

Assembly Details

Seatposts

With Lemond OCLV bikes, DO NOT grease the seatpost. A fiberglass sleeve bonded into the 'seat tube' prevents corrosion, and any grease may cause the seatpost to slip, even with correct seatpost binder torque.

Lemond road bikes are designed to accept 27.2 mm seat posts with a tolerance of 27.10 to 27.20 mm outer diameter. Measure the seatpost for conformity to this tolerance prior to installation.

For seat post binder bolts, tighten to 85-125 lb•in (9.6-14.1 NM).

Bottom bracket

Be sure bottom bracket threads are clean and well greased before insertion. Failure to do so may cause galling of the threads, especially when inserting into an aluminum bottom bracket shell or aluminum bonded insert (like on our OCLV bikes).

Chainkeepers and Chainstay guards

Lemond OCLV frames must always be fitted with a chainkeeper and chainstay guard to protect against damage in case of chainsuck or overshifting past the inner chainring.

Special Parts

TCG Part

Chainkeeper	T83663
Chainstay guard	T950130
Extra length brake nuts	T950112
Front derailleur braze-on plate (Maillot Jaune, Chambery)	T83201
OCLV bottom bracket cable guide	T942820
Road SP18 bottom bracket cable guide	T963350

Removing Headset Cups

When removing an headset in a Lemond OCLV frame, make sure the headset removal tool is engaging the headset cup. Lemond OCLV framesets do not utilize a continuous headtube, but instead use two short inserts to support the headset cups. If the headset tool is outside the insert, rather than inside the insert and pressing on the cup, frame damage can result.

Lemond OCLV Road Frame Hardware

On OCLV frames, the large diameter tubes add stiffness and strength. However, this increased size can require unconventional fastening of parts. That's why we use a braze-on style front derailleur, and extra long brake attachment nuts.

The longer nuts are required for the rear brake on all Lemond OCLV frames. It is also required on our new Air Rail fork, found on the Maillot Jaune, Chambery, and Zurich.

O.L.D. vs Rear Triangle Spacing

O.L.D. (Over Locknut Dimension) is a measurement of the hub width on the outside of the axle locknuts. When we list OLD, we're referring to the rear hub. In addition, we have listed the frame dimensions rather than the hub.

MAILLOT JAUNE

Our Price: \$

Main tubes	T972711	OCLV carbon						39	53
		OCLV carbon						12	86 117
Stays		OCLV, Air Rail						13	79 108
Fork		Campagnolo Record						14	74 100
Headset		22.2/30.2/26.4, 36.5 mm stack						15	69 93
Handlebars		Cinelli Top Ergo						16	64 88
Stem		26.4mm clamp diameter						17	61 82
Grips		Cinelli Grammo Ti						19	54 74
Shifters	T962177	Cinelli white cork tape						21	49 67
Front derailleur	T972701/2	Campagnolo Record ErgoPower						23	45 61
Rear derailleur	T972700	Campagnolo Record							
Brakes	T972699	Campagnolo Record							
Brake levers	T972107/8	Campagnolo Record							
Crankset		combination shift/brake							
Bottom bracket		Campagnolo Record 53/39							
Pedals	T962511	135 mm bolt hole circle							
Cassette	60212	T-Gear CroMoly, cartridge							
Chain	T973669	68 x 106							
Front wheel	T973668	Shimano Dura-Ace SPD clipless, 9/16" axle							
Front hub	T972725	Campagnolo Record ExaDrive12-23, 9spd							
Front tire		Campagnolo 9spd							
Rear wheel		106L length							
Rear hub		Campagnolo Vento							
Rear tire		Continental GrandPrix, foldable, 700 x 23c							
Tubes		Campagnolo Vento							
Rims		Campagnolo Exa-Drive cassette, 9spd, 130 mm O.L.D.							
Spokes		Continental Grand Prix, foldable, 700 x 23c							
Saddle		Presta superlight							
Seatpost		Campagnolo Vento							
Seat binder		16 spokes/ front/ rear(D/ND)							
Additional		LeMond Selle San Marco Strada, Ti rails, perforated leather cover							
Colors		Campagnolo Record							
		27.2 mm diameter							
		Alloy w/integral bolt							
		35.1 clamp diameter							
		2 water bottle mounts							
		Yellow to Purple fade • Red on Blue decals							
Frame sizes		47	49	51	53	55	57	59	
Handlebar width		380	400	420	420	440	440	440	
Stem length		90	90	100	110	120	120	120	
Crank length		170	170	172.5	172.5	172.5	175	175	
Seatpost length		250	250	250	250	250	250	250	
Steerer, mm		131	131	139	155	174	193	211	
Head angle		72.0	72.5	73.0	73.8	73.8	74.0	74.0	
Seat angle		75.0	75.0	74.0	73.5	73.0	73.0	72.5	
MM	Standover	749	759	773	793	811	830	848	
	Seat tube	500	520	540	560	580	600	620	
	Head tube	96	96	104	121	140	159	177	
	Eff top tube	518	528	545	560	570	580	590	
	Reach	608	618	645	670	690	700	710	
	Chainstays	408	408	410	410	412	412	412	
	BB height	266	266	266	268	268	268	268	
	Offset	45	45	45	45	45	45	45	
	Trail	60	57	54	53	53	52	52	
	Wheelbase	979	982	987	986	994	1001	1006	
IN	Standover	29.5	29.9	30.4	31.2	31.9	32.7	33.4	
	Seat tube	19.7	20.5	21.3	22.0	22.8	23.6	24.4	
	Head tube	3.8	3.8	4.1	4.8	5.5	6.3	7.0	
	Eff top tube	20.4	20.8	21.5	22.0	22.4	22.8	23.2	
	Reach	23.9	24.3	25.4	26.4	27.2	27.6	28.0	
	Chainstays	16.1	16.1	16.1	16.1	16.2	16.2	16.2	
	BB height	10.5	10.5	10.5	10.6	10.6	10.6	10.6	
	Offset	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
	Trail	2.4	2.2	2.1	2.1	2.1	2.0	2.0	
	Wheelbase	38.5	38.7	38.9	38.8	39.1	39.4	39.6	

Our Price: \$

Main tubes		OCV carbon						39 53
Stays		OCV carbon						12 86 117
Fork		OCV, Air Rail						13 79 108
Headset	61631	Shimano Ultegra cartridge	22.2/30.2/26.4, 37.6 mm stack					14 74 100
Handlebars		Cinelli Giro d'Italia (38, 40), Campione d'Italia (42, 44), 26.4mm clamp dia						15 69 93
Stem		Cinelli XE	22.2 mm insertion					17 61 82
Grips	T962177	Cinelli white cork tape						19 54 74
Shifters	6195112	Shimano Ultegra STI Dual Control						21 49 67
Front derailleur	61474	Shimano Ultegra	Down pull, Braze-on style					23 45 61
Rear derailleur	61513	Shimano Ultegra						
Brakes	61115	Shimano Ultegra Dual Pivot						
Brake levers		combination shift/brake						
Crankset		Shimano Ultegra 53/39	130 mm bolt hole circle					
Bottom bracket	61034	Shimano BB-UN72	68 x 115					
Pedals	60213	Shimano Ultegra SPD clipless, 9/16" axle						
Cassette	61212	Shimano HG90 12-23	8spd					
Chain	61247	Shimano HG90	106L length					
Front wheel								
Front hub	61769	Shimano Ultegra						
Front tire		Continental GrandPrix, foldable, 700 x 23c						
Rear wheel								
Rear hub	61771	Shimano Ultegra	HyperGlide cassette, 8spd, 130 mm O.L.D.					
Rear tire		Continental Grand Prix, foldable, 700 x 23c						
Tubes		Presta superlight						
Rims	T962153	Mavic Reflex	Velox, 16mm rim strip					
Spokes		DT 15/16G butted stainless, alloy nipples, 32 spokes/296 front/293/295 rear(D/ND)/3x						
Saddle	T970204	LeMond Selle San Marco Strada, Ti rails, perforated leather cover						
Seatpost		PM-501 alloy micro-adjust	27.2 mm diameter					
Seat binder	F973708	Alloy w/integral bolt	35.1 clamp diameter					
Additional		2 water bottle mounts						
Colors		White • Yellow on Black decals						
Frame sizes		47	49	51	53	55	57	59
Handlebar width		380	400	420	420	420	440	440
Stem length		T970225	T970226	T970227	T970227	T970227	T970228	T970228
Stem length		80	90	100	110	120	120	120
Crank length		T970440	T970441	T970442	T970443	T970444	T970444	T970444
Crank length		170	170	172.5	172.5	172.5	175	175
Seatpost length		61350	61350	61352	61352	61352	61354	61354
Seatpost length		250	250	250	250	250	250	250
Steerer, mm		57800	57800	57800	57800	57800	57800	57800
Head angle		139	139	147	168	182	201	220
Seat angle		72.0	72.5	73.0	73.8	73.8	74.0	74.0
Seat angle		75.0	75.0	74.0	73.5	73.0	73.0	72.5
MM	Standover	749	759	773	793	811	830	848
	Seat tube	500	520	540	560	580	600	620
	Head tube	96	96	104	121	140	159	177
	Eff top tube	518	528	545	560	570	580	590
	Reach	598	618	645	670	690	700	710
	Chainstays	408	408	410	410	412	412	412
	BB height	266	266	266	268	268	268	268
	Offset	45	45	45	45	45	45	45
	Trail	60	57	54	53	53	52	52
	Wheelbase	979	982	987	986	994	1001	1006
IN	Standover	29.5	29.9	30.4	31.2	31.9	32.7	33.4
	Seat tube	19.7	20.5	21.3	22.0	22.8	23.6	24.4
	Head tube	3.8	3.8	4.1	4.8	5.5	6.3	7.0
	Eff top tube	20.4	20.8	21.5	22.0	22.4	22.8	23.2
	Reach	23.5	24.3	25.4	26.4	27.2	27.6	28.0
	Chainstays	16.1	16.1	16.1	16.1	16.2	16.2	16.2
	BB height	10.5	10.5	10.5	10.6	10.6	10.6	10.6
	Offset	1.8	1.8	1.8	1.8	1.8	1.8	1.8
	Trail	2.4	2.2	2.1	2.1	2.1	2.0	2.0
	Wheelbase	38.5	38.7	38.9	38.8	39.1	39.4	39.6

Main tubes		Reynolds 853 double butted							39 53
Stays		True Temper Cro-Moly							12 86 117
Fork		OCLV, Air Rail							13 79 108
Headset	T942142	Tange Seiki alloy precision 22.2/30.2/26.4, 25.4 mm stack							14 74 100
Handlebars		Cinelli Giro d'Italia (38-40), Campione d'Italia (42-46), 26.4mm clamp dia							15 69 93
Stem		Cinelli XE 22.2 mm insertion							17 61 82
Grips	T962177	Cinelli white cork tape							19 54 74
Shifters	6195112	Shimano Ultegra STI Dual Control							21 49 67
Front derailleur	61474	Shimano Ultegra Down pull, 31.8 mm/ 1 1/4"							23 45 61
Rear derailleur	61513	Shimano Ultegra							
Brakes	61115	Shimano Ultegra Dual Pivot combination shift/brake							
Brake levers		Shimano Ultegra 53/39 130 mm bolt hole circle							
Crankset		Shimano BB-UN72 68 x 115							
Bottom bracket	61034	Shimano Ultegra SPD clipless, 9/16" axle							
Pedals		Shimano HG70 12-23 8spd							
Cassette	61207	Shimano HG70 108L length							
Chain	61246								
Front wheel	973480								
Front hub	61769	Shimano Ultegra							
Front tire		Continental GrandPrix, foldable, 700 x 23c							
Rear wheel	973479								
Rear hub	61771	Shimano Ultegra HyperGlide cassette, 8spd, 130 mm O.L.D.							
Rear tire		Continental Grand Prix, foldable, 700 x 23c							
Tubes		Presta superlight							
Rims	T962152	Mavic Open 20 Velox, 16mm rim strip							
Spokes		DT 15G 32 spokes/295 front/292/294 rear(D/ND)/3x							
Saddle	T970207	LeMond Selle San Marco Strada, CrMo rails, leather cover							
Seatpost		PM-501 alloy micro-adjust 27.2 mm diameter							
Seat binder	F961814	Alloy w/integral bolt 31.8 clamp diameter							
Additional		2 water bottle mounts							
Colors		Silver/ Inkwell Blue fade• Yellow on Black decals							
Frame sizes		47	49	51	53	55	57	59	61
Handlebar width		380	400	420	420	440	440	440	460
Stem length		T970225	T970226	T970227	T970227	T970228	T970228	T970228	T970159
		80	90	100	110	120	120	120	130
Crank length		T970440	T970441	T970442	T970443	T970444	T970444	T970444	T970445
		170	170	172.5	172.5	172.5	175	175	175
Seatpost length		61350	61350	61352	61352	61352	61354	61354	61354
		250	250	250	250	250	250	250	250
Steerer, mm		57800	57800	57800	57800	57800	57800	57800	57800
Head angle		126	126	141	156	174	191	216	236
Seat angle		72.0	72.5	72.5	73.0	73.5	73.5	74.0	74.0
MM		74.5	74.0	73.8	73.8	73.0	72.5	72.5	72.0
Standover		743	753	768	786	805	822	845	863
Seat tube									
Head tube		85	85	100	115	132	150	175	195
Eff top tube		510	520	532	545	565	575	590	605
Reach		590	610	632	655	685	695	710	735
Chainstays		412	412	415	415	415	415	418	418
BB height		266	266	266	266	266	266	268	268
Offset		45	45	45	45	45	45	45	45
Trail		60	57	57	54	55	55	52	52
Wheelbase		965	967	980	984	995	1000	1007	1021
IN									
Standover		29.3	29.6	30.2	30.9	31.7	32.4	33.3	34.0
Seat tube									
Head tube		3.3	3.3	3.9	4.5	5.2	5.9	6.9	7.7
Eff top tube		20.1	20.5	20.9	21.5	22.2	22.6	23.2	23.8
Reach		23.2	24.0	24.9	25.8	27.0	27.4	28.0	28.9
Chainstays		16.2	16.2	16.3	16.3	16.3	16.3	16.5	16.5
BB height		10.5	10.5	10.5	10.5	10.5	10.5	10.6	10.6
Offset		1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
Trail		2.4	2.2	2.2	2.1	2.2	2.2	2.0	2.0
Wheelbase		38.0	38.1	38.6	38.7	39.2	39.4	39.6	40.2

Our Price: \$

BUENOS AIRES

Main tubes		True Temper double butted Cro-Moly							39 53
Stays		True Temper Cro-Moly							12 86 117
Fork		Cro-Moly							13 79 108
Headset	61630	Tange Seiki Passage DX	22.2/30.2/26.4, 35.3 mm stack						14 74 100
Handlebars		Cinelli Giro d'Italia (38-40), Campione d'Italia (42-46), 26.4mm clamp dia							15 69 93
Stem		Cinelli XE	22.2 mm insertion						17 61 82
Grips	T972631	Neoprene tape							19 54 74
Shifters	61946/7	Shimano 105SC STI Dual Control							21 49 67
Front derailleur	61469	Shimano 105SC	Down pull, 31.8 mm/ 1 1/4"						23 45 61
Rear derailleur	61511	Shimano 105SC							
Brakes	61114	Shimano 105SC Dual Pivot							
Brake levers		combination shift/brake							
Crankset		Shimano 105SC 53/39	130 mm bolt hole circle						
Bottom bracket	61031	Shimano BB-UN52	68 x 107						
Pedals	60213	Shimano Ultegra SPD clipless, 9/16" axle							
Cassette	61207	Shimano HG70 12-23	8spd						
Chain	61245	Shimano HG50							
Front wheel	973482								
Front hub	61761	Shimano 105SC							
Front tire		Continental GrandPrix, foldable, 700 x 23c							
Rear wheel	973481								
Rear hub	61763	Shimano 105SC	HyperGlide cassette, 8spd, 130 mm O.L.D.						
Rear tire		Continental Grand Prix, foldable, 700 x 23c							
Tubes		Presta superlight							
Rims	T962152	Mavic Open 20	Velox, 16mm rim strip						
Spokes		DT 15G 32 spokes/295 front/292/294 rear(D/ND)/3x							
Saddle	T970207	LeMond Selle San Marco Strada, CrMo rails, leather cover							
Seatpost		PM-501 alloy micro-adjust	27.2 mm diameter						
Seat binder	F961814	Alloy w/integral bolt	31.8 clamp diameter						
Additional		2 water bottle mounts							
Colors		Race Red • Black on Yellow decals							
Frame sizes		47	49	51	53	55	57	59	61
Handlebar width		380	400	400	420	420	440	440	440
Stem length		T970225	T970226	T970226	T970227	T970227	T970228	T970228	T970228
		80	90	100	110	120	120	120	130
Crank length		T970440		T970442	T970443	T970444	T970444	T970444	T970445
		170	170	172.5	172.5	172.5	175	175	175
Seatpost length		61342	61342	61343	61343	61343	61344	61344	61344
		250	250	250	250	250	250	250	250
		57800	57800	57800	57800	57800	57800	57800	57800
Steerer, mm		124	124	139	154	172	189	214	234
Head angle		72.0	72.5	72.5	73.0	73.5	73.5	74.0	74.0
Seat angle		74.5	74.0	73.8	73.8	73.0	72.5	72.5	72.0
MM		743	753	768	786	805	822	845	863
Standover									
Seat tube									
Head tube		85	85	100	115	132	150	175	195
Eff top tube		510	520	532	545	565	575	590	605
Reach		590	610	632	655	685	695	710	735
Chainstays		412	412	415	415	415	415	418	418
BB height		266	266	266	266	266	266	268	268
Offset		47	47	47	47	43	43	43	43
Trail		60	57	57	54	55	55	52	52
Wheelbase		965	967	980	984	995	1000	1007	1021
IN		29.3	29.6	30.2	30.9	31.7	32.4	33.3	34.0
Standover									
Seat tube									
Head tube		3.3	3.3	3.9	4.5	5.2	5.9	6.9	7.7
Eff top tube		20.1	20.5	20.9	21.5	22.2	22.6	23.2	23.8
Reach		23.2	24.0	24.9	25.8	27.0	27.4	28.0	28.9
Chainstays		16.2	16.2	16.3	16.3	16.3	16.3	16.5	16.5
BB height		10.5	10.5	10.5	10.5	10.5	10.5	10.6	10.6
Offset		1.9	1.9	1.9	1.9	1.7	1.7	1.7	1.7
Trail		2.4	2.2	2.2	2.1	2.2	2.2	2.0	2.0
Wheelbase		38.0	38.1	38.6	38.7	39.2	39.4	39.6	40.2

Main tubes		True Temper double butted Cro-Moly							39 53
Stays		True Temper Cro-Moly							12 86 117
Fork		Cro-Moly							13 79 108
Headset	55487	Tange Seiki Passage	22.2/30.2/26.4, 30.9 mm stack						14 74 100
Handlebars		System 2 road, alloy	26.0mm clamp diameter						15 69 93
Stem		System 2 road, heat treated Cro-Moly, 22.2 mm insertion							17 61 82
Grips	T972633	Neoprene tape							19 54 74
Shifters	T962162/13	Campagnolo Mirage ErgoPower							21 49 67
Front derailleur	T962169	Campagnolo Veloce	Down pull, 31.8 mm/ 1 1/4"						23 45 61
Rear derailleur	T962168	Campagnolo Mirage							
Brakes	T962165/16	Campagnolo Mirage							
Brake levers		combination shift/brake							
Crankset		Campagnolo Mirage 53/39	135 mm bolt hole circle						
Bottom bracket	962173	Campagnolo Mirage cartridge, 68 x 111							
Pedals	60213	Shimano SPD M535 clipless	9/16" axle						
Cassette	T962161	Campagnolo Veloce ExaDrive	12-23, 8spd						
Chain	T962167	Sachs ED-50	108L length						
Front wheel	973484								
Front hub	T962157	Campagnolo Mirage							
Front tire		Continental Super Sport Ultra, 700 x 23c							
Rear wheel	973483								
Rear hub	T962159	Campagnolo Mirage	Campagnolo Exa-Drive cassette, 8spd, 130 mm O.L.D.						
Rear tire		Continental Super Sport Ultra, 700 x 23c							
Tubes		Presta superlight							
Rims	T962151	Mavic CXP-10	Velox, 16mm rim strip						
Spokes		DT 15G	32 spokes/294 front/292/294 rear(D/ND)/3x						
Saddle	T962154	SSM Tecno Dynamic							
Seatpost		PM-312 alloy micro-adjust	27.2 mm diameter						
Seat binder	F961814	Alloy w/integral bolt	31.8 clamp diameter						
Additional		2 water bottle mounts							
Colors		Cannibal Orange • Black on White decals							
Frame sizes		47	49	51	53	55	57	59	61
Handlebar width		380	400	400	420	420	440	440	440
Stem length		57170	57171	57171	57172	57172	57173	57173	57173
		80	90	100	110	120	120	120	130
Crank length		57064	57065	57066	57067	57069	57069	57069	57069
		170	170	172.5	172.5	175	175	175	175
Seatpost length		T962170	T962170	T962171	T962171	T962172	T962172	T962172	T962172
		250	250	250	250	250	250	250	250
Steerer, mm		57120	57120	57120	57120	57120	57120	57120	57120
Head angle		120	120	135	150	167	185	210	230
Seat angle		72.0	72.5	72.5	73.0	73.5	73.5	74.0	74.0
		74.5	74.0	73.8	73.8	73.0	72.5	72.5	72.0
MM	Standover	743	753	768	786	805	822	845	863
	Seat tube								
	Head tube	85	85	100	115	132	150	175	195
	Eff top tube	510	520	532	545	565	575	590	605
	Reach	590	610	632	655	685	695	710	735
	Chainstays	412	412	415	415	415	415	418	418
	BB height	266	266	266	266	266	266	268	268
	Offset	47	47	47	47	43	43	43	43
	Trail	60	57	57	54	55	55	52	52
	Wheelbase	965	967	980	984	995	1000	1007	1021
IN	Standover	29.3	29.6	30.2	30.9	31.7	32.4	33.3	34.0
	Seat tube								
	Head tube	3.3	3.3	3.9	4.5	5.2	5.9	6.9	7.7
	Eff top tube	20.1	20.5	20.9	21.5	22.2	22.6	23.2	23.8
	Reach	23.2	24.0	24.9	25.8	27.0	27.4	28.0	28.9
	Chainstays	16.2	16.2	16.3	16.3	16.3	16.3	16.5	16.5
	BB height	10.5	10.5	10.5	10.5	10.5	10.5	10.6	10.6
	Offset	1.9	1.9	1.9	1.9	1.7	1.7	1.7	1.7
	Trail	2.4	2.2	2.2	2.1	2.2	2.2	2.0	2.0
	Wheelbase	38.0	38.1	38.6	38.7	39.2	39.4	39.6	40.2

Main tubes		True Temper double butted Cro-Moly							26 36 46
Stays		True Temper Cro-Moly							11 63 87 111
Fork		Cro-Moly							12 57 79 101
Headset	55487	Tange Seiki Passage 22.2/30.2/26.4, 30.9 mm stack							14 49 68 87
Handlebars		System 1 road, alloy 26.0mm clamp diameter							16 43 60 76
Stem		System 1 90° road, Cro-Moly 22.2 mm insertion							18 38 53 68
Grips	T972633	Neoprene tape, white/grey							21 33 45 58
Shifters	6194011	Shimano RSX STI Dual Control							24 29 40 51
Front derailleur	61464	Shimano RSX STI Down pull, 31.8 mm/ 1 1/4"							
Rear derailleur	61508	Shimano RSX GS							
Brakes	61112	Shimano RSX Dual Pivot combination shift/brake							
Brake levers		Shimano RSX 46/36/26 74/110 mm bolt hole circle							
Crankset		Shimano BB-LP26 68 x 118							
Bottom bracket	T961922	Shimano SPD M535 clipless 9/16" axle							
Pedals	60216	Shimano HG50 11-24 7spd							
Cassette	61172	Shimano HG50 104L length							
Chain	61245								
Front wheel	973486								
Front hub	61745	Shimano RSX							
Front tire		Continental Super Sport Ultra, 700 x 23c							
Rear wheel	973485								
Rear hub	61747	Shimano RSX HyperGlide Compact cassette, 7spd, 130 mm O.L.D.							
Rear tire		Continental Super Sport Ultra, 700 x 23c							
Tubes		Presta superlight							
Rims	T962151	Mavic CXP-10 Velox, 16mm rim strip							
Spokes		DT 15G 32 spokes/295 front/292/294 rear(D/ND)/3x							
Saddle	T962154	SSM Tecno Dynamic							
Seatpost		PM-312 alloy micro-adjust 27.2 mm diameter							
Seat binder	F961814	Alloy w/integral bolt 31.8 clamp diameter							
Additional		Rack mounts, 2 water bottle mounts							
Colors		Sapphire • White decals							
Frame sizes		47	49	51	53	55	57	59	61
Handlebar width		380	400	400	420	420	420	440	440
Stem length		57170	57171	57171	57172	57172	57172	57173	57173
		65	80	80	100	100	120	120	120
Crank length		T971085	T971086	T971086	T971087	T971087	T971088	T971088	T971088
		170	170	170	170	175	175	175	175
Seatpost length		61334	61334	61334	61334	61335	61335	61335	61335
		250	250	250	250	250	250	250	250
Steerer, mm		57120	57120	57120	57120	57120	57120	57120	57120
		120	120	135	150	167	185	210	230
Head angle		72.0	72.5	72.5	73.0	73.5	73.5	74.0	74.0
Seat angle		74.5	74.0	73.8	73.8	73.0	72.5	72.5	72.0
Standover		743	753	768	786	805	822	845	863
MM									
Seat tube		85	85	100	115	132	150	175	195
Head tube		510	520	532	545	565	575	590	605
Eff top tube		572	596	608	641	661	690	705	720
Reach		412	412	415	415	415	415	418	418
Chainstays		266	266	266	266	266	266	268	268
BB height		47	47	47	47	43	43	43	43
Offset		60	57	57	54	55	55	52	52
Trail		965	967	980	984	995	1000	1007	1021
Wheelbase		29.3	29.6	30.2	30.9	31.7	32.4	33.3	34.0
Standover									
IN									
Seat tube		3.3	3.3	3.9	4.5	5.2	5.9	6.9	7.7
Head tube		20.1	20.5	20.9	21.5	22.2	22.6	23.2	23.8
Eff top tube		22.5	23.5	23.9	25.2	26.0	27.2	27.8	28.4
Reach		16.2	16.2	16.3	16.3	16.3	16.3	16.5	16.5
Chainstays		10.5	10.5	10.5	10.5	10.5	10.5	10.6	10.6
BB height		1.9	1.9	1.9	1.9	1.7	1.7	1.7	1.7
Offset		2.4	2.2	2.2	2.1	2.2	2.2	2.0	2.0
Trail		38.0	38.1	38.6	38.7	39.2	39.4	39.6	40.2
Wheelbase									

Main tubes		True Temper double butted Cro-Moly							39 53
Stays		True Temper Cro-Moly							11 94 127
Fork		Cro-Moly							12 86 117
Headset	55487	Tange Seiki Passage	22.2/30.2/26.4, 30.9 mm stack						14 74 100
Handlebars		System 1 road, alloy	26.0mm clamp diameter						16 64 88
Stem		System 2 road, heat treated Cro-Moly, 22.2 mm insertion							18 57 78
Grips	T972632	Neoprene tape							21 49 67
Shifters	61940/11	Shimano RSX STI Dual Control							24 43 58
Front derailleur	61466	Shimano RX100	Down pull, 31.8 mm/ 1 1/4"						
Rear derailleur	61507	Shimano RSX SS							
Brakes	61112	Shimano RSX Dual Pivot							
Brake levers		combination shift/brake							
Crankset		Sugino AC130 53/39	130 mm bolt hole circle						
Bottom bracket	T961922	Shimano BB-LP26	68 x 118						
Pedals	57184	System 1 Road w/clips and straps, 9/16" axle							
Cassette	61172	Shimano HG50 11-24	7spd						
Chain	61245	Shimano HG50							
Front wheel	973486								
Front hub	61745	Shimano RSX							
Front tire		Continental Sport	700 x 23c						
Rear wheel	973485								
Rear hub	61747	Shimano RSX	HyperGlide Compact cassette, 7spd, 130 mm O.L.D.						
Rear tire		Continental Sport	700 x 23c						
Tubes		Presta superlight							
Rims	T962151	Mavic CXP-10	Velox, 16mm rim strip						
Spokes		DT 15G	32 spokes/295 front/292/294 rear(D/ND)/3x						
Saddle	T962154	SSM Tecno Dynamic							
Seatpost		PM-312 alloy micro-adjust	27.2 mm diameter						
Seat binder	F961814	Alloy w/integral bolt	31.8 clamp diameter						
Additional		Rack mounts, 2 water bottle mounts							
Colors		Violet • Yellow decals							
Frame sizes		47	49	51	53	55	57	59	61
Handlebar width		380	400	400	420	420	440	440	440
Stem length		57170	57171	57171	57172	57172	57173	57173	57173
		80	90	100	110	120	120	120	130
Crank length		57064	57065	57066	57067	57068	57068	57068	57069
		170	170	170	170	175	175	175	175
Seatpost length		T972645	T972645	T972645	T972645	T972646	T972646	T972646	T972646
		250	250	250	250	250	250	250	250
Steerer, mm		57120	57120	57120	57120	57120	57120	57120	57120
Head angle		120	120	135	150	167	185	210	230
Seat angle		72.0	72.5	72.5	73.0	73.5	73.5	74.0	74.0
		74.5	74.0	73.8	73.8	73.0	72.5	72.5	72.0
MM	Standover	743	753	768	786	805	822	845	863
	Seat tube								
	Head tube	85	85	100	115	132	150	175	195
	Eff top tube	510	520	532	545	565	575	590	605
	Reach	590	610	632	655	685	695	710	735
	Chainstays	412	412	415	415	415	415	418	418
	BB height	266	266	266	266	266	266	268	268
	Offset	47	47	47	47	43	43	43	43
	Trail	60	57	57	54	55	55	52	52
	Wheelbase	965	967	980	984	995	1000	1007	1021
IN	Standover	29.3	29.6	30.2	30.9	31.7	32.4	33.3	34.0
	Seat tube								
	Head tube	3.3	3.3	3.9	4.5	5.2	5.9	6.9	7.7
	Eff top tube	20.1	20.5	20.9	21.5	22.2	22.6	23.2	23.8
	Reach	23.2	24.0	24.9	25.8	27.0	27.4	28.0	28.9
	Chainstays	16.2	16.2	16.3	16.3	16.3	16.3	16.5	16.5
	BB height	10.5	10.5	10.5	10.5	10.5	10.5	10.6	10.6
	Offset	1.9	1.9	1.9	1.9	1.7	1.7	1.7	1.7
	Trail	2.4	2.2	2.2	2.1	2.2	2.2	2.0	2.0
	Wheelbase	38.0	38.1	38.6	38.7	39.2	39.4	39.6	40.2

Our Price: \$

Main tubes Stays Fork Rear shock Headset Handlebars Stem Bar ends Grips Shifters Front derailleur Rear derailleur Brakes Brake levers Crankset Bottom bracket Pedals Cassette Chain Front wheel Front hub Front tire Rear wheel Rear hub Rear tire Tubes Rims Spokes Saddle Seatpost Seat binder Additional Colors Frame sizes Handlebar width Stem length Crank length Seatpost length Steerer, mm Head angle Seat angle			
MM Standover Seat tube Head tube Eff top tube Reach Chainstays BB height Offset Trail Wheelbase			
IN Standover Seat tube Head tube Eff top tube Reach Chainstays BB height Offset Trail Wheelbase			

Our Price: \$

Main tubes Stays Fork Rear shock Headset Handlebars Stem Bar ends Grips Shifters Front derailleur Rear derailleur Brakes Brake levers Crankset Bottom bracket Pedals Cassette Chain Front wheel Front hub Front tire Rear wheel Rear hub Rear tire Tubes Rims Spokes Saddle Seatpost Seat binder Additional Colors Frame sizes Handlebar width Stem length Crank length Seatpost length Steerer, mm Head angle Seat angle			
MM Standover Seat tube Head tube Eff top tube Reach Chainstays BB height Offset Trail Wheelbase			
IN Standover Seat tube Head tube Eff top tube Reach Chainstays BB height Offset Trail Wheelbase			

WARRANTY

Gary Fisher Bicycle Company Limited Warranty

The Gary Fisher Bicycle Company warrants each new Fisher bicycle frame and rigid fork against defects in workmanship and materials for the lifetime of the original owner, except full suspension bikes which are warranted for the first five years of ownership by original owner. Gary Fisher Bicycle Company likewise warrants all original parts, excluding suspension forks and rear shock absorbers, for a period of one year from the date of purchase. Suspension forks and rear shock absorbers shall be covered by the stated warranty of their original manufacturers. Paint and decals are warranted for one year. This warranty is expressly limited to the repair or replacement of a defective frame, fork, or defective part and is the sole remedy of the warranty. This warranty applies only to the original owner and is not transferable.

Claims under this warranty must be made through an authorized Gary Fisher dealer. Proof of purchase is required. A warranty registration card must be completed and received by the Gary Fisher Bicycle Company before a warranty claim may be processed.

The warranty does not cover normal wear and tear, improper assembly or follow-up maintenance, or installation of parts or accessories not originally intended or compatible with the bicycle as sold.

The warranty does not apply to damage or failure due to accident, misuse, abuse, or neglect. Modification of the frame or components shall void this warranty.

Gary Fisher Bicycle Company shall not be responsible for incidental or consequential damages. Some states do not allow the exclusion of incidental or consequential damages, so the above exclusion may not apply to you. Labor charges for parts changeovers are not covered by the warranty.

This warranty gives the consumer specific legal rights, and those rights may vary from place to place. This warranty does not effect the statutory rights of the consumer.

LeMond Bicycles Limited Warranty

LeMond Bicycles warrants each new LeMond bicycle frame and fork against defects in workmanship and materials for the first five years of ownership by original owner. LeMond Bicycles likewise warrants all original parts for a period of one year from the date of purchase. Paint and decals are warranted for one year. This warranty is expressly limited to the repair or replacement of a defective frame, fork, or defective part and is the sole remedy of the warranty. This warranty applies only to the original owner and is not transferable.

Claims under this warranty must be made through an authorized LeMond dealer. Proof of purchase is required. A warranty registration card must be completed and received by LeMond Bicycles before a warranty claim may be processed.

The warranty does not cover normal wear and tear, improper assembly or follow-up maintenance, or installation of parts or accessories not originally intended or compatible with the bicycle as sold.

The warranty does not apply to damage or failure due to accident, misuse, abuse, or neglect. Modification of the frame or components shall void this warranty.

LeMond Bicycles shall not be responsible for incidental or consequential damages. Some states do not allow the exclusion of incidental or consequential damages, so the above exclusion may not apply to you. Labor charges for parts changeovers are not covered by the warranty.

This warranty gives the consumer specific legal rights, and those rights may vary from place to place. This warranty does not effect the statutory rights of the consumer.

What to do with a Defective Frame or Fork

When a consumer comes to you with a frame or fork that is covered by the warranty, please do the following:

1. Evaluate the item. Fisher approves over 90% of all the items that are returned for warranty. Don't be afraid to make a warranty call if it is an obvious warranty claim. We trust you and want you to give your customers the best service possible.
2. Call your Inside Sales Rep. They will issue a UPS Call Tag, or a Returned Goods Authorization (RGA) number for the frameset. Fisher will repair or replace the item and return it to you. Warranty items cannot be accepted without either a Call Tag or an RGA. This will ensure that the item is properly handled and processed quickly.
3. Completely remove ALL parts from the frame or fork before packaging. We make every effort to return a warranty claim as fast as possible. Since tracking parts from a frameset would slow this process considerably, we rely on you to remove and save all parts.

UPS Call Tags and Returned Goods Authorization (RGA) numbers

There are two ways to return a frameset to Fisher. UPS Call Tags usually take 5-10 working days to appear at your door. With a Call Tag, there is no shipping charge to you.


To substantially decrease the time for a Call Tag, you can ship the frame or fork to us via normal UPS ground service and we will credit you for the shipping expense. To have a Call Tag or RGA issued, call your Inside Rep with the following information:

1. Serial Number
2. Size
3. Model name
4. Color
5. Nature of the problem

How to Receive Credit for Defective Parts

Defective parts should be tagged with a Fisher Warranty Claim Tag (see below). Each item on the tag must be completed. Write clearly.

This tag will ensure that you receive proper credit. All parts should be kept in a "Fisher Only" or "LeMond Only" box for the Road Rep. They will pick up the defective parts and write a credit while in your store. They will also leave a copy of the paperwork so your bookkeeper will be able to reference the credit memo to the RGA.

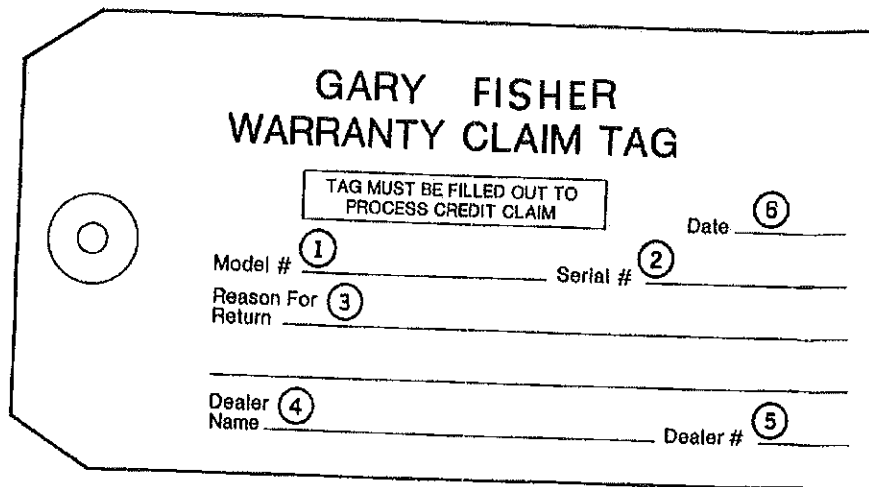

The form is a rectangular tag with a hole on the left side. It contains the following fields and instructions:

- GARY FISHER WARRANTY CLAIM TAG**
- TAG MUST BE FILLED OUT TO PROCESS CREDIT CLAIM**
- Model #** (1) _____
- Serial #** (2) _____
- Reason For Return** (3) _____
- Dealer Name** (4) _____
- Dealer #** (5) _____
- Date** (6) _____

1. Complete Model Number or Name of bicycle
2. Serial number; found on bottom bracket, or right rear dropout
3. What is wrong with the part. Please be specific.
4. Name of your store
5. Your store's Dealer Number
6. Date

C

C

C

C

C

C

