

2007

TECHNICAL MANUAL ROAD / MTB COMPONENTS

ENGLISH



SRAM®

**Caution:**

This Technical Manual is intended for bicycle factories and qualified bicycles dealers only!

REPAIR WORK**Caution:**

Unauthorized work may result in its malfunctioning, which may endanger you and could lead to invalidation of the warranty.

© Copyright SRAM Corporation 2006

Publ. No. 95.7915.001.000 E

Information may be enhanced without prior notice.

Released November 2006

SRAM Technical Documentation,
Schweinfurt/Germany

Teflon is a trademark of E.I. DuPont de Nemours and Co.

Campagnolo, EXA-Drive are trademarks of Campagnolo S.R.L., Italia.

Grilon is a trademark of EMS-Chemie AG, Switzerland.

Shimano, HG, HG-I, IG, DURA-ACE, Rapid Rise are trademarks of Shimano Inc., Japan.

TABLE OF CONTENTS

ROAD / MTB COMPONENTS



ROAD COMPONENTS →

	Force / Rival · Rear derailleurs	3
	Force / Rival · Front derailleurs	7
	Force / Rival · Double Tap Shifters	10
	Force / Rival · Cranksets with Bottom Bracket	12
	Force / Rival · Dual Pivot Road Calipers	14
	Cassettes · Road	16
	Power Chains · Road	18

MTB COMPONENTS →

REAR DERAILEURS		
	X.0 / X-9 / X-7 / SX 5 / SX 4 / 3.0	21
	SRAM ESP	27

FRONT DERAILEURS		
	X-9 / X-7 / 3.0 High Clamp	31
	X-9 / X-7 Low Clamp	35

TWIST SHIFTERS		
	X.0 / X-9 / X-7 / Rocket / Attack	39
	SX 5 / Centera	42
	SX 4 / MRX Pro	44
	3.0 Comp / MRX Comp	46
	3.0 Plus / 3.0 / MRX Plus / MRX	48

TRIGGER SHIFTERS		
	X.0 / X-9	50
	X-7 / SX 5 / Attack	52
	SX 4 / TRX	54

	CASSETTES	56
---	------------------	----

	POWER CHAINS	60
---	---------------------	----

SUPPORT		
	Distributors / Spare Parts	64

FORCE / RIVAL · REAR DERAILLEURS


TECHNICAL DATA / ASSEMBLY REQUIREMENTS




FORCE
RIVAL

	Force	Rival
Speeds	10	10
Shifter Compatibility	SRAM Double Tap shifters (Force / Rival)	SRAM Double Tap shifters (Force / Rival)
Cogsets	SRAM 10 speed and other 10 speed Shimano* cogsets (largest Cog maximum 28 teeth)	
Chains	SRAM 10 speed Power Chains PC 1090R / PC 1090 / PC 1070 and Shimano* 10 speed chains	
Cranks / Chainrings	10 speed compatible, 53-39 / 50-34 / 50-36 / 48-34 / 52-36	
Cable & Housing	High quality 1.1 mm shifting cable and 4 or 5 mm compressionless housing, high quality, with non-sealed end caps of maximum diameter 5.8 mm and maximum length 16 mm	
Chain Capacity		
Total	31 T	31 T
Max Sprocket	28 T	28 T
Min Sprocket	11 T	11 T
Front Difference	16 T	16 T
Parallelogram Spring	Steel	Steel
Pulleys	Cartridge bearing	Cartridge bearing
Direct Mount	Yes	Yes
Weight	176 g	186 g
B-Knuckle	Aluminum	Aluminum
Outer Link	Aluminum	Aluminum
Inner Link	Magnesium	Aluminum
Outer Cage	Carbon Comp.	Aluminum
Inner Cage	Aluminum	Aluminum
Hanger Bolt	Aluminum	Aluminum


1



2



DERAILLEUR ANATOMY

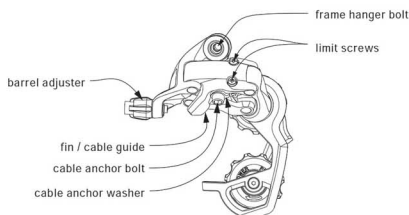

FRAME DIMENSIONS

(see figure 1 and 2)

For optimal rear derailleur performance,

the recommended rear derailleur hanger length (L) should be 24 – 26 mm.


L	X	A	R1	R2	T
24	4 – 10	30° – 35°	8.5 max	11.5 – 12.5	7 – 8
26	6 – 10	30° – 35°	8.5 max	11.5 – 12.5	7 – 8

Chainstay length ≥ 405 mm


FORCE / RIVAL · REAR DERAILLEURS ASSEMBLY

1


5 mm
8 – 10 Nm
70 – 85 in.lbs.




2



3



4



ASSEMBLY

Advice:

Check the rear derailleur hanger alignment. A bent rear derailleur hanger will result in inaccurate index shifting.

- Attach the rear derailleur to the frame's rear derailleur hanger using a 5 mm hex head wrench (**Fig. 1**).
- Check that the b-adjust washer tab is clear of the rear derailleur dropout tab (**Fig. 2**).
- Tighten the 5 mm hex hanger bolt to 8 – 10 Nm (70 – 85 in.lbs.) (**Fig. 1**).

CHAIN LENGTH

- Bypassing the rear derailleur, run the chain around the largest cog/large chainring combination (**Fig. 3**).
- Add 2 LINKS or 1 link + connection link to this length for proper chain length.

LIMIT SCREWS ADJUSTMENT

- View the rear derailleur and pulleys from behind the rear of the bicycle (**Fig. 4**).
- Turn the limit screw marked 'H' on the outer link of the derailleur to align the upper guide pulley center with the outboard edge of the smallest cog (**Fig. 4**).
- While turning the crank, push the rear derailleur towards the larger cogs by hand.
- Align the upper guide pulley under the largest cog, center to center, by turning the limit screw marked 'L' on the outer link (**Fig. 4**).

CHAIN GAP ADJUSTMENT

Chain gap is the distance between the upper guide pulley and the cog the chain is riding on. Optimal chain gap is small enough to allow quick, efficient shifts to and from any cog, but large enough to allow smooth shifts to and from the largest cog.

- Shift the chain to the small chain ring.
- Check the chain gap between the tip of the smallest cog and the tip of the upper guide pulley. While turning the crank, push the rear derailleur by hand to the largest cog and check the chain gap in this position. (**Fig. 5**).
- Using a screw driver, turn the b-adjust screw until the minimum chain gap in either position equals approximately 6 mm.

Advice:

- **Setting the chain gap at this point of your installation may be considered a rough estimate. Precision index shifting may require small changes of the b-adjustment while setting the proper cable tension.**
- **Do not use the b-adjust screw to adjust the rear derailleur to act as a chain-tensioning device or to prevent chain suck. This increases the chain gap causing poor shifting performance.**


INDEX SHIFTING ADJUSTMENT

- Check that the chain and the rear derailleur are in the smallest cog position.
- Cut the rear piece of cable housing. Make sure that it is not too short or long (**Fig. 6**).
- Make sure the shifter cable is fully released (hardest (highest) gear at rear shifter).
- Turn the rear derailleur barrel adjuster clockwise fully into the derailleur, then back it off 1 full turn.
- Feed the rear shifter cable through the rear derailleur cable housing, stops and cable guides.
- Thread the cable through the rear derailleur barrel adjuster and around the cable guide on the fin (**Fig. 6**).
- Pull the cable tight and position it under the cable anchor washer.
- Tighten the 5 mm hex cable anchor bolt to 4 – 5 Nm (35 – 45 in.lbs.).
- Rapidly shift the chain and derailleur up and down the cassette several times. If the cable slips repeat the two former steps.
- Shift the chain to the smallest cog.
- While pedaling, move the shifter up one detent.
 - If the chain hesitates or does not shift to the second cog, increase the cable tension by turning the derailleur barrel adjuster counterclockwise.
 - If the chain shifts beyond the second cog, decrease the cable tension by turning the derailleur barrel adjuster clockwise.
- Repeat the two former steps until shifting and cable tension is accurate.
- While turning the crank, shift the chain up and down the cassette and chain rings several times to ensure that your derailleur is indexing smoothly.


FORCE / RIVAL · REAR DERAILLEURS ASSEMBLY / MAINTENANCE




5



6

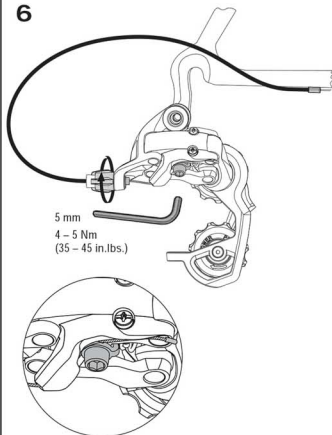

7



MAINTENANCE

- Wipe out debris from the interior of cage plates and parallelogram linkage. Brush the derailleur with clean or soapy water.
- Rinse the derailleur with clean water and let air dry.
- Relubricate – while turning the crankset – both pulleys by spraying some lube between the dust cover and the shoulder of the pulley (**Fig. 7**).
- Apply some lube to the parallelogram pivots.

TROUBLESHOOTING

Problem	Cause	Remedy
Chain jumps from smallest sprocket to frame dropout.	High gear limit screw is not adjusted properly.	Turn in screw H until the guide pulley is aligned with the smallest sprocket.
Difficult or impossible to shift chain onto smallest sprocket.	High gear limit screw is not adjusted properly.	Unscrew screw H until the guide pulley is aligned with the smallest sprocket.
Chain jumps over largest sprocket and falls between the spokes and largest sprocket or inner cage plate scrapes on spokes.	Low gear limit screw is not adjusted properly.	Turn in screw L until the guide pulley is aligned with the largest sprocket.
Delayed shifting.	Rear derailleur or derailleur hanger is bent.	Straighten or replace.
Rough shifting behavior.	Clearance between guide pulley / sprocket is too large.	Adjust b-adjust screw by rotating counterclockwise.
Shifts more gears onto smaller sprockets as intended	Clearance between guide pulley / sprocket is too small.	Adjust b-adjust screw by rotating clockwise.
Delayed shifting onto larger sprocket	Shift cable insufficiently tensioned.	Turn barrel adjuster on the shifter counterclockwise.
Delayed shifting onto smaller sprocket	Shift cable insufficiently tensioned.	Turn barrel adjuster on the shifter counterclockwise.
	Shift cable is too tight.	Turn barrel adjuster on the shifter clockwise.
	Excessive cable friction, pinched or poorly routed cable.	Lubricate or replace cable and housing. Check for excessive bending of cable housing.

FORCE / RIVAL · FRONT DERAILLEURS


TECHNICAL DATA / ASSEMBLY REQUIREMENTS



FORCE
RIVAL

	Force	Rival
Clamp	Braze-on	Yes
	31.8 mm	Yes
	34.9 mm	Yes
Compatibility	Rear Compatibility	10 speed
	Shifter Compatible	SRAM Double Tap Shifter (Force / Rival) SRAM Double Tap Shifter (Force / Rival)
	Cogsets	SRAM 10 speed and other 10 speed Shimano® cogsets (largest Cog maximum 28 teeth)
	Chains	SRAM 10 speed Power Chains PC 1090R / PC 1090 / PC 1070 and Shimano® 10 speed chains
	Crank / Chainrings	10 speed compatible, 53-39 / 50-34 / 50-36 / 48-34 / 52-36
Design	Cable & Housing	High quality 1.1 mm shifting cable and 4 or 5 mm compressionless housing, high quality, with non-sealed end caps of maximum diameter 5.8 mm and maximum length 16 mm
	Maximum Tooth Difference	16T
	Cable Routing	Bottom Pull
	Chainstay Angle	61 – 66°
	Mount Type	Down Swing
	Chain Line	44.5 mm
	Weight	Braze-on: 88 g / 31.8 mm: 102 g / 34.9 mm: 103 g
	Band Material	Forged Aluminum
	Outer Link	Aluminum
	Inner Link	Aluminum
	Chain Cage	Steel Chrome Plated

1



FRAME DIMENSIONS

(see Fig. 1)

The seat tube should be positioned in the center of the bottom bracket shell.

Length of chainstay:

- Road L > 405 mm.
- Rear frame alignment must be symmetrical.


Chainstay angle:

$\alpha = 61^\circ - 66^\circ$.


Chainline:

44.5 mm.

(Measurement from the center of the bracket to the center of the two chain-rings.)



2



NECESSARY CLEARANCE FOR CLAMP VERSION


(see Fig. 2)

Be sure to leave enough clearance between bottle cage holes and clamp location.


Necessary clearance see Fig. 2				
Large Chaining	48 T	50 T	52 T	53 T
Clamp band position A	135 mm	139 mm	143 mm	145 mm
B	152 mm	156 mm	160 mm	162 mm

FORCE / RIVAL · FRONT DERAILLEURS ASSEMBLY


1




2



3



4



ASSEMBLY

- Attach the front derailleur to the seat tube.
Direct mount version (see **Figure 1**): use upper thread for compact chainrings (50-36 / 50-34 / 48-34) or lower thread for standard chainrings (53-39 / 52-36).

- Adjust the position along the seat tube so that clearance between the front derailleur cage and the large chainring is 1 – 3 mm (**Fig. 2**).

At the same time, align the front derailleur cage outerplate to be parallel with the chainrings (**Fig. 3**).


- Tighten the 5 mm hex clamp bolt to 5 – 7 Nm (44 – 62 in.lbs.).

LOW LIMIT ADJUSTMENT (see Fig. 4)

- Place the chain on the largest rear cog and the small front chainring.
- Adjust the low limit screw (**Fig. 4**) so that the chain is positioned close to the inner cage plate without actually touching it (clearance between the front derailleur cage inner plate and the chain is 0.5 – 1 mm).

CONNECTING CABLE

- Check that the chain and the front derailleur are in the small chainring position.
- Make sure the shifter cable is fully released (easiest (lowest) gear for front shifter).
- Turn the barrel adjuster on the frame fully into the housing, then turn 1 full turn back.



- Feed the front shifter cable through the cable housing and stops. Route cable through a cable guide beneath the bottom bracket.
- Run the cable under the cable anchor washer and hold taut (**Fig. 5**).
- Tighten the 5 mm hex cable anchor bolt to 5 Nm (44 in.lbs.).
- Shift the chain up and down the chainrings several times to take out initial slack in the cable.
- If necessary re-tension the cable and tighten cable anchor bolt.





HIGH LIMIT ADJUSTMENT (see Fig. 6)

- Set the chain to the smallest rear cog and the large front chainring.
- Adjust the high limit screw so that clearance between the front derailleur cage outer plate and the chain is 0.5 – 1 mm.

INDEX SHIFTING ADJUSTMENT (see Fig. 7)

Shift the chain onto the smallest rear sprocket and small chainring. Make sure the left shifter is set in the middle position – if the chain scrapes against the inner cage plate, turn the adjusting barrel on the shifter clockwise until the chain shifts smoothly and free of obstruction.

FORCE / RIVAL · FRONT DERAILLEURS ASSEMBLY / MAINTENANCE



ADVICE

Avoid using extreme gear combinations as these combinations cause noise and excessive wear!



MAINTENANCE

- Do not use solvents or corrosive materials to clean the components.
- Lubricate the shifting joints regularly (**Fig. 8**).
- Grease any cable guides (e.g. beneath the bottom bracket).

TROUBLESHOOTING

Problem	Cause	Remedy
Shifter actuated, chain fails to change chainring.	Shift cable incorrectly clamped.	Check shift cable and correct as necessary (cable clamp; cable housing stops; cable recess in shifter; cable tension).
	High / low limit screw poorly adjusted.	Correct limit screws.
	Clearance between cage and large chainring is too big / small.	Correct position (1 – 3 mm).
Chain falls over large / small chainring.	High / low limit screw poorly adjusted.	Correct limit screws.
Force required to actuate gears is too high.	Excessive cable friction, pinched or poorly routed cable.	Lubricate or replace cable and housing. Check for excessive bending of cable housing.
Crank collides with front derailleur.	High gear limit screw incorrectly adjusted.	Correct high limit screw.
	Cage not parallel with chainring.	Correct the front derailleur position.

FORCE / RIVAL · DOUBLE TAP SHIFTERS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

FORCE
RIVAL

	Force		Rival	
	Version	Double Tap Shifter	Double Tap Shifter	Double Tap Shifter
Compatibility	Shifter Type	Front	Rear	Front
	Speeds	2	10	2
	Deraillleur	SRAM Force / Rival	SRAM Force / Rival	SRAM Force / Rival
	Crankset	SRAM Force / Rival	SRAM Force / Rival	SRAM Force / Rival
	Brakes	SRAM Force / Rival Dual Pivot Road calipers, Avid Shorty 4/6 cantilevers, Avid BB7 Road and most common Road caliper brakes		
	Shifter Cable	high quality 1.1 m shifting cable and 4 or 5 mm compressionless housing, high quality, with non-sealed end caps of maximum diameter 5.8 mm and maximum length 16 mm		
	Brake Cable	1.6 mm high quality brake cable with road-style cable end and brake cable housing with end caps		
	Cable Pull Release	Double Tap	Double Tap	Double Tap
	Cable	Teflon Coat. Stainl. Steel	Teflon Coat. Stainl. Steel	Stainless Steel
	Gear Indication	None	None	None
	Barrel Adjuster	None	None	None
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm
	Weight	303 g	303 g	340 g

FORCE / RIVAL · DOUBLE TAP SHIFTERS

ASSEMBLY

1



ASSEMBLY

- Flip hood cover by hand. Slide shifter onto handlebar (**Fig. 1**).
Tighten the 5 mm hex clamp bolt to 6 – 8 Nm (53 – 70 in.lbs.) (**Fig. 2**).
- Feed the shifter cables and brake cables through the cable housings and stops. Make sure the shifter cable is fully released (easiest (lowest) gear for front shifter or the hardest (highest) gear for rear shifter).
- Replace hood cover.
- Attach the front/rear shifter cable to the front/rear deraillleur and adjust indexing per deraillleur instructions. Attach the front/rear brake cable to the front/rear brake and adjust per brake instructions.

Caution:

Always check the front and rear brake levers for proper operation.

2




5 mm
6 – 8 Nm
53 – 70 in.lbs.

FORCE / RIVAL · DOUBLE TAP SHIFTERS USE / MAINTENANCE



1



2



3



4



5



USE

SHIFTER


- Move the small shift lever inward slightly and an upshift to a harder (higher) gear is initiated (**Fig. 1**). Push the same lever farther inward and you're shifting up to three shifts to easier (lower) gears (**Fig. 1**).

The shifters also offer specific operations:


- Upshifting while sprinting:



- Shifting from the hoods:



- Shifting from the drops:



- The left hand shifter offers a trim function for the front derailleur to allow the chain running smoothly on the small chainring in extreme positions. (Shift position 1 and 2 is for the small chainring. Shift position 3 is for the large chainring.)

BRAKE LEVER

Caution:

Always check the front and rear brake levers for proper operation!

MAINTENANCE

CHANGE OF SHIFTER CABLE

Advice:

- **Leave the shifter on the handlebar.**
- **Use only new, high quality shifter cable and compressionless cable housing with end caps.**
- Make sure the shifter cable is fully released (easiest (lowest) gear for front shifter or the hardest (highest) gear for rear shifter).
- Detach the cable from the rear / front derailleur.
- Flip hood cover by hand (**Fig. 2**).
- Push cable out of the shifter and discard (**Fig. 3**).
- Feed the new cable through the shifter and the cable housing and cable stops.
- Pull the cable snug.
- Replace hood cover.
- Attach the cable to the rear / front derailleur and adjust indexing per derailleur instructions.

CHANGE OF BRAKE CABLE

Advice:

- **Use only new, high quality brake cable with road-style cable end and brake cable housing with end caps.**
- Detach the cable from the brake.
- Actuate brake lever and push out cable (**Fig. 4**).
- We recommend to apply a small amount of grease onto the countersunk side (1, **Fig. 5**) and the pivot points (2, **Fig. 5**) of the brake cable holder.
- Actuate brake lever. Make sure the countersunk side of the hole is visible. Feed the new cable through the cable holder, cable housing and cable stops.
- Pull the cable snug. Make sure that the cable nipple is firmly seated in the cable holder.
- Attach the cable to the brake and adjust per brake instructions.


FORCE / RIVAL · CRANKSETS W. GXP BOTTOM BRACKET TECHNICAL DATA / ASSEMBLY REQUIREMENTS

FORCE
RIVAL

	Force	Force Compact	Rival	Rival Compact
Compatibility	BB Type	GXP External Bearing ←	GXP External Bearing ←	
	BB Thread	BSA or Italian ←	BSA or Italian ←	
	Bolt Circle Diam.	130 mm	130 mm	110 mm
	Chainring Ratio	53 / 39 T	53 / 39 T	50 / 34 – 50 / 36 T
	Chains	SRAM 10 speed Power Chains PC 1090R / PC 1090 / PC 1070 and Shimano® 10 speed chains		
	Chainline	44.5 mm ←	44.5 mm ←	
Finish	Minimum Chainstay	405 mm ←	405 mm ←	
	Crank Lengths	165 / 170 / 172.5 / 175 / 177.5 / 180 mm	165 / 170 / 172.5 / 175 / 177.5 / 180 mm	
	Bearing	Sealed Cartridge Bearing	Sealed Cartridge Bearing	
	Weight	790 g	850 g	840 g
	BB Cup	Forged Alloy ←	Forged Alloy ←	
	Crank Arm	Carbon Fibre ←	AL 6066 Aluminum ←	
	Chainring	AL 7075-T6 Aluminum with TNT Finish	AL 7075-T6 Aluminum with Hard Anodizing	
	Chainring Bolts	AL 7075-T6 Aluminum ←	AL 7075-T6 Aluminum ←	

Cranksets are only compatible with GXP bottom brackets and Powerglide Chainrings by Truvativ.

FORCE / RIVAL · CRANKSETS W. GXP BOTTOM BRACKET ASSEMBLY



NECESSARY TOOLS

- Torque wrench
- 8 mm hex, 16 mm (5/8") hex
- Bottom Bracket installation tool (Truvativ GXP tool, Park™ BBT9 or equivalent)

Supplies:

- Grease


PARTS PREPARATION

- Assume the frame's bottom bracket shell threads are clean and undamaged, there should be no paint or dirt present. Have your bottom bracket shell chased and faced by your bike shop for best results. Check to make sure the threads of your GXP bottom bracket match the threads in the bottom bracket shell of your frame.

- Prepare the bottom bracket as shown in **Figure 1**.

It may be necessary to remove the drive side seal from the spindle. Both seals should be pressed into place so that the outer lip seats firmly in the bottom bracket cup groove. Apply grease to the surfaces shown in **Figure 1**.


- Prepare the crank spindle:
 - Apply grease to splines (1, **Figure 2**)
 - Apply grease to crankbolt threads (2)
 - Apply grease to spindle bearing race surfaces (3)
- Prepare the self extracting crank bolt: Apply grease to the surfaces shown in **Figure 3**.




FORCE / RIVAL · CRANKSETS W. GXP BOTTOM BRACKET ASSEMBLY




4




5



6



7



ASSEMBLY

• Grease frame threads (**Fig. 4**). Thread the prepared bottom bracket into the drive side (right side) of the frame (counterclockwise to tighten English (BSA) thread or clockwise to tighten Italian thread) until the flange bottoms against the frame shell face. Torque to 34 – 41 Nm (301 – 363 in.lbs.) using a torque wrench. Refer to **Figure 4**.

• Grease frame threads (**Fig. 5**). Thread the prepared left adapter cup into the non-drive side (left side) of the frame (Clockwise to tighten) until the flange bottoms against the frame shell face. Torque the left adapter cup to 34 – 41 Nm (301 – 363 in.lbs.) using a torque wrench.

• Grease the inner bearing races as shown in **Figure 6**. Slide the right crankarm and spindle assembly through the bottom bracket until the left side splines come through the left side bottom bracket cup, and the spindle stops.

• If the crank bolt assembly has not been assembled yet, assemble it and torque as shown in **Figure 7**. Use a 16 mm hex (5/8") and torque wrench to install self extractor and torque to 12 – 15 Nm (106 – 133 in.lbs.).

• Assemble the left crankarm onto the bottom bracket spindle using an 8 mm hex and torque wrench and torque to 48 – 54 Nm (425 – 478 in.lbs.) as shown in **Figure 8**.

• Check the assembly for play by pulling crankarm away from frame, alternating back and forth. If the crank moves, tighten crankarm bolt until no play is detected. If maximum torque of 48 – 54 Nm (425 – 478 in.lbs.) has been achieved, remove the crankarm from the spindle, apply additional grease, and repeat installation. It may take several installations to eliminate all play.

• Grease the pedal threads, add pedal washers (1, **Figure 8**), assemble and tighten the pedals to the crankarms with 31 – 34 Nm (274 – 301 in.lbs.).

Caution:


Drivetrain side right hand pedal-thread. Non drive side left hand pedal-thread.

Advice:

• If creaking of the assembly occurs, check that all parts were torqued to specification, grease is liberally applied on all surfaces noted. Also check chainring bolts (8 – 9 Nm / 80 – 90 in.lbs.) and pedals are installed with proper lubrication and torque.

• GXP seals are designed to prevent contamination and therefore must rub against their sealing surfaces. New GXP seals will feel stiff upon initial installation. This is normal. With use the seals will wear-in and loosen up.

8



FORCE / RIVAL · DUAL PIVOT ROAD CALIPERS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

FORCE
RIVAL

		Force		Rival	
		Front	Rear	Front	Rear
Compat.	Version	SRAM Force / Rival Double Tap shifters		SRAM Force / Rival Double Tap shifters	
	Brake Levers	1.6 mm high quality brake cable with road-style cable end and brake cable housing with end caps			
	Brake Cable				
	Pad	Exchangeable	←	Exchangeable	←
Design	Quick Release	Yes	←	Yes	←
	Barrel Adjuster	Yes	←	Yes	←
	Weight	279 g	279 g	289 g	287 g
	Pivot Bolt	Titanium	←	Stainless Steel	←
	Arms	Cold Forged Aluminum / Skeletonized Design		Cold Forged Aluminum	

FORCE / RIVAL · DUAL PIVOT ROAD CALIPERS

ASSEMBLY

1



ASSEMBLY

Install the brake caliper:

Hold the brake so it is approximately centered on the wheel, then tighten the brake mounting nut with a 5 mm Allen wrench, tighten to 8 – 10 Nm (70 – 90 in.lbs.) (*Figure 1*).

Position the brake pads:

Adjusting the brake pad position as shown in *figure 2*. Toe-in, the angle of contact between the pad and the rim, can also be adjusted to optimize braking feel and performance.

- Tighten the brake pad bolt with a 4 mm allen key to 5 – 7 Nm (44 – 62 in.lbs.).

Connect the brake cable:

- Make certain the quick release lever is in the closed position (*Figure 3*).
- Place the cable in the groove in the cable clamp washer (*Figure 4*).
- Squeeze the brake caliper until each brake pad is 2 to 4 mm from the rim.
- Tighten the cable bolt to 6 – 8 Nm (53 – 70 in.lbs.).
- Turn the barrel adjuster to reset the shoe clearance (*Figure 5*).

Center the brake pads:

- Loosen the mounting nut of the caliper brake a bit (*Figure 6*).
- Use a 12 mm wrench to precisely center the brake to the rim.
- Re-tighten the brake mounting nut to 8 – 10 Nm (70 – 90 in.lbs.).

Inspection:

Squeeze brake lever hard 10 times to check that everything is operating correctly, then re-check the brake pad position and clearance to the rim.

2



FORCE / RIVAL · DUAL PIVOT ROAD CALIPERS ASSEMBLY



3



MAINTENANCE

Replacement of the brake pads:

- Remove the fixing bolt with a 1.5 mm Allen wrench (Figure 7).
- Slide the old pads out of the holders and replace with new pads (Figure 8).
- Both the pads and holders are marked left or right – be sure to install them on the correct side.
- Install and lightly tighten the fixing bolt to 0.5 – 1 Nm (4.5 – 9 in.lbs.)

4



5




6



7



8



For Brake Lever information please read the integrated brake shifter User Manual.

Caution:

- Brakes are a safety-critical item on a bicycle. Improper set-up or use of brakes can result in loss of control or an accident, which could lead to a severe injury. It is your responsibility to learn proper braking techniques. Consult the user manual for your bicycle and a professional bike dealer. Practice your riding and braking techniques on a flat and level surface prior to aggressive riding.**
- The effectiveness of braking is dependent on many conditions over which SRAM has no control including the speed of the bicycle, type and condition of the riding surface, braking lever force, proper installation and maintenance of brakes, cables, levers, brake pads, the condition of the bike, weight of the rider, braking technique, weather, and a variety of other factors. Remember, it takes longer to stop in wet conditions.
- SRAM brakes and levers are not intended for use on any motorized bicycle or vehicle. Any such use could result in a serious personal injury.
- Inspect your brakes regularly for damage, and always inspect them thoroughly after any crash or severe impact. If you detect damage, please have your brakes inspected by a professional bike dealer.
- Follow these instructions carefully. If you do not understand the instructions, have the installation done by a professional bike mechanic.

Advice:

- SRAM's road brake pads are optimized for aluminum rims. If used with ceramic-coated or carbon rims, the brake pads will wear more rapidly. Be certain to inspect them often.
- If the brake pads are worn until the grooves disappear, replace them with new pads.

CASSETTES · ROAD

TECHNICAL DATA / ASSEMBLY REQUIREMENTS




OG 1070

		OG 1070 <i>NEW</i>				
Compatibility	Application	Road	Road	Road	Road	Road
	Technology	Open Glide	Open Glide	Open Glide	Open Glide	Open Glide
	Largest Cog	26 T	26 T	23 T	25 T	25 T
	Speeds	10	10	10	10	10
	Chains	SRAM 10 speed Power Chains PC 1090R, PC 1090, PC 1070 and Shimano® 10 speed chains				
Design	Hubs	Any hub with Shimano® compatible driver body (not compatible with Shimano® DURA-ACE 10 speed cassettes bodies)				
	Cogs	12/13/14/15/16/17/19/21/23/26	11/12/13/14/15/17/19/21/23/26	11/12/13/14/15/16/17/19/21/23	12/13/14/15/16/17/19/21/23/25	11/12/13/14/15/17/19/21/23/25
	Lockring torque	40 Nm	40 Nm	40 N	40 N	40 N
	Weight (11-23T)	243 g	232 g	210 g	234 g	225 g
	Cogs	Heat treated steel	Heat treated steel	Heat treated steel	Heat treated steel	Heat treated steel
	Spider	Aluminum 6061	Aluminum 6061	Aluminum 6061	Aluminum 6061	Aluminum 6061
	Lockring	Aluminum, anodized	Aluminum, anodized	Aluminum, anodized	Aluminum, anodized	Aluminum, anodized
Design	Rivets	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
	Finish	Pearl Ni-Chrome Plated	Pearl Ni-Chrome Plated	Pearl Ni-Chrome Plated	Pearl Ni-Chrome Plated	Pearl Ni-Chrome Plated

OG 1070

		OG 1070 <i>NEW</i>	
Compatibility	Application	Road	Road
	Technology	Open Glide	Open Glide
	Largest Cog	27 T	28 T
	Speeds	10	10
	Chains	SRAM 10 speed Power Chains PC 1090R, PC 1090, PC 1070 and Shimano® 10 speed chains	
Design	Hubs	Any hub with Shimano® compatible driver body (not compatible with Shimano® DURA-ACE 10 speed cassettes bodies)	
	Cogs	12/13/14/15/16/17/19/21/24/27	11/12/13/14/15/17/19/22/25/28
	Lockring torque	40 N	40 Nm
	Weight (11-23T)	235 g	239 g
	Cogs	Heat treated steel	Heat treated steel
	Spider	Aluminum 6061	Aluminum 6061
	Lockring	Aluminum, anodized	Aluminum, anodized
Design	Rivets	Stainless Steel	Stainless Steel
	Finish	Pearl Ni-Chrome Plated	Pearl Ni-Chrome Plated

9 / 8 speed cassettes see page 56 and 57.



ASSEMBLY

The sprockets are arranged on a plastic support (Speedloader).

- Remove the transportation lock.
- Versions with sprockets with 11 teeth: Remove the locking from the front and the sprocket with 11 teeth from the back of the Speedloader.
- Versions with sprockets with 12 teeth: Remove the locking from the Speedloader.
- Align the spline patterns of the Speedloader with the driver of the hub and press the Speedloader against the driver (**Figure 1**).
- Push the cassette from the Speedloader onto the driver of the hub.
- Only versions with sprockets with 11 teeth: Position the sprocket with 11 teeth on the driver (**Figure 2**).
- Screw the locking into the driver. Use a mounting tool (1, Fig. 3) (Park Tool® FR-5 or Shimano®) and a chain wrench (2, Fig. 3). Tightening torque 40 Nm (350 in.lbs.) (**Figure 3**).

Advice:

Be careful not to damage the thread of the locking by tilting.

- After installing the rear wheel adjust the rear derailleur per derailleur instructions.

CLEANING

Caution:

Do not use acid cleaner on the cogs! They will get brittle and can break under heavy load! Use an oily rag, soapy water, gasoline or diesel instead.

POWER CHAINS · ROAD

TECHNICAL DATA / ASSEMBLY REQUIREMENTS


POWER CHAINS

	PC 1090R <i>NEW</i>	PC 1090 <i>NEW</i>	PC 1070 <i>NEW</i>	
Application	Road	Road	Road	
Max. No. of sprockets	10 only	10 only	10 only	
Compatibility Front	Truvativ / HG / EXA-Drive	Truvativ / HG / EXA-Drive	Truvativ / HG / EXA-Drive	
Compatibility Rear	SRAM OG / HG / EXA-Drive	SRAM OG / HG / EXA-Drive	SRAM OG / HG / EXA-Drive	
Dimension	$\frac{1}{2}'' \times \frac{11}{32}''$	$\frac{1}{2}'' \times \frac{11}{32}''$	$\frac{1}{2}'' \times \frac{11}{32}''$	
Length	5.87 mm	5.87 mm	5.87 mm	
Riveting	Cylindrical	Cylindrical	Cylindrical	
Chrome Hardened	Yes	Yes	Yes	
Push Power	2000 N / 450 lbs.	2000 N / 450 lbs.	2000 N / 450 lbs.	
Min. Tensile Strength	9000 N / 2023 lbs.	9000 N / 2023 lbs.	9000 N / 2023 lbs.	
Weight (114 links)	257 g	265 g	265 g	
Design				
External Pin Plate	Silver / Nickel Plated	Silver / Nickel Plated	Silver / Nickel Plated	
Internal Pin Plate	Silver / Nickel Plated	Silver / Nickel Plated	Grey	
Connecting Method ¹	Power Lock 10 Speeds	Power Lock 10 Speeds	Power Lock 10 Speeds	

¹ **Caution:** Connecting method: with Power Lock only (no pin)!

9 / 8 speed chains see page 60 and 61.

1



**PC 1090R / PC 1090 /
PC 1070**
($\frac{1}{2}$ " x $\frac{11}{128}$ ")

Chain length:

(A chain tool will be required to shorten the chain.)

- Replacing a worn chain:
Measure the worn chain and shorten the new to the same length.

- Initial assembly:
Shorten the chain to the length specified by the derailleur manufacturer.

SRAM derailleurs:

place the chain over largest front chain-wheel and largest rear sprocket and add 1 link + Power Lock (Fig.1).


Opening:

Once the Power Lock is installed it can only be removed by means of a Chain tool.

Caution:

- **Power Lock is for one-time use only!**
- **Always use a new Power Lock when fitting a new chain.**
- **Failure to shorten the chain properly or to lock it exactly into place may cause damage to the chain and eventually total chain failure, material damage or the rider to fall off his bicycle resulting in injury.**
- **Worn sprockets should also be replaced when a new chain is fitted.**

2



Closing chain with Power Lock:


Caution:

- **Use Power Lock only with SRAM chains!**
- **Use only Power Lock to close 10 speed chains (no Pin)!**
- **Use only Power Lock (black coloured) for PC 1090R, PC 1090, PC 1070 to avoid material damage or the rider to fall off his bicycle resulting in injury.**


MAINTENANCE / CARE

- Clean dirty chains before oiling. Do **not** use any acidic agents. Cleaning agent must be rinsed off after a few minutes with water. Apply oil after chain is completely dried.
- Regular lubrication will extend the chain's service life. Apply oil to the chain links rollers and allow to work in.

3




4



- Fit chain, insert both halves of the Power Lock into the chain ends (Fig. 2) and bring the ends together (Fig. 3) on the bottom side of the drivetrain (no tension side).
- Pull chain apart until you feel some resistance (Fig. 4).
- Rotate the chain so the Power Lock is positioned on the top side of the drivetrain (Fig. 5).
- Pedal forward while holding bike firmly in place (Fig. 5) until you hear click sound. The Power Lock is now on its place and safely closed.

5



X.0 / X-9 / X-7 / SX 5 / SX 4 / 3.0 · REAR DERAILLEURS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS



X
·
O

X
-
9

X
-
7


S
X
5

S
X
4


3
·
O

	X.0			X-9		X-7		SX 5		SX 4		3.0	
	Speeds			9/8		9/8		9/8		8/7		8/7	
Compatib.	Shifter Compatibility			SRAM 1:1 Actuation Ratio 9 / 8 speed shifters				←				SRAM 1:1 8 / 7spd shifters	
	Cogsets & Chains			SRAM / IG & HG 9/8spd		SRAM / IG & HG 9/8spd		SRAM / IG & HG 9/8spd		SRAM / IG & HG 9/8spd		SRAM / IG & HG 8/7spd	
	Chainrings			22-32-42/44, 24-34-46, 26-36-46/48				←		←		←	
Chain Capacity	Total	45 T	37 T	30 T	45 T	37 T	45 T	37 T	45 T	37 T	45 T		
	Cage Length	Long	Medium	Short	Long	Medium	Long	Medium	Long	Medium	Long	Med. Long	
	Max Sprocket	34 T			34 T		34 T		34 T		34 T		
	Min Sprocket	11 T			11 T		11 T		11 T		11 T		
	Front Difference	22 T			22 T		22 T		22 T		22 T		
	Parallelogram Spring	Titanium			Steel		Steel		Steel		Steel		
	Pulleys	Cartr. bearing, stainless			Cartr.bear./Bush., hard.		Bushing, hardened		Bushing		Bushing		
	Direct Mount			Yes		Yes		Yes		Yes		Yes	
	Cable & Housing												
	1.1 or 1.2 mm high quality cables, 4 or 5 mm compressionless cable housing with end cap / maximum diameter of 5.8 mm												
Design	Weight	210 g	197 g	192 g	230 g	225 g	275 g	N/A	309 g	N/A	309 g	N/A	275 g
	B-Knuckle	Forged Aluminum / Anod.			Aluminum		Aluminum		Aluminum		Aluminum		Compos.
	Outer Link	Forged Aluminum			Alu die-cast / Painted		Alu die-cast / Painted		Aluminum		Zinc Alloy		Compos.
	Inner Link	Forged Aluminum			Aluminum / Anodized		Steel / E-coat		Steel / E-coat		Composite		Steel
	Outer Cage	Alumin. Carbon Composite			Stamped AL / Anodized		Stamped AL / Anodized		Steel / E-coat		Steel / E-coat		
	Inner Cage	Alumin. Carbon Composite			Stamped AL / Anodized		Steel		Steel		Steel		Compos.
	Hanger Bolt	Aluminum / Anodized			Aluminum / Anodized		Aluminum / Anodized		Steel		Steel		


1



DERAILLEUR ANATOMY

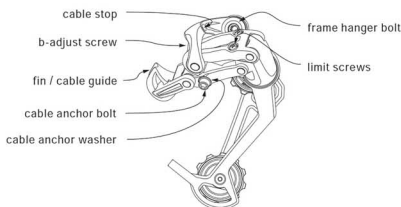

2



FRAME DIMENSIONS

(see figure 1 and 2)


• For optimal 1:1 Actuation Ratio rear derailleur performance, the recommended rear derailleur hanger length (L) should be 28 – 30 mm.

• For a given L, use the chart below to determine other 1:1 Actuation Ratio rear derailleur hanger specifications.

L	X	A	R1	R2	T
28	6 – 10	25° – 30°	8.5 max	11.5 – 13.5	7 – 8
30	7.5 – 10	25° – 30°	8.5 max	11.5 – 13.5	7 – 8

X.0 / X-9 / X-7 / SX 5 / SX 4 / 3.0 · REAR DERAILLEURS ASSEMBLY

1



ASSEMBLY

Advice:

Check the rear derailleur hanger alignment. A bent rear derailleur hanger will result in inaccurate index shifting. Inboard side impacts are the most common causes of this type of damage.


- Attach the rear derailleur to the frame's rear derailleur hanger using a 5 mm hex head wrench (**Fig. 1**).
- Check that the b-adjust washer tab (b-adjust screw) is clear of the rear derailleur dropout tab (**Fig. 2**).
- Tighten the 5 mm hex hanger bolt to 8 - 10 Nm (70 - 85 in.lbs.) (**Fig. 1**).

CHAIN LENGTH

A properly measured chain will prevent damage in case of accidentally shifting to the largest chain ring and cog combination. This type of accidental shifting may cause harmful binding or seizure of the chain and potentially cause severe damage.

- Bypassing the rear derailleur, run the chain around the largest cog/large chainring combination (**Fig. 3**).
– For rear suspension frames, position the rear suspension for the greatest chain length required.
- Add 2 LINKS or 1 link + Connecting Link to this length for proper chain length.


2




LIMIT SCREWS ADJUSTMENT

- View the rear derailleur and pulleys from behind the rear of the bicycle (**Fig. 4**).
- Turn the limit screw marked 'H' on the outer link of the derailleur to align the upper guide pulley center with the outboard edge of the smallest cog – clockwise moves the guide pulley inboard towards the wheel.
- While turning the crank, push the rear derailleur towards the larger cogs by hand.
- Align the upper guide pulley under the largest cog, center to center, by turning the limit screw marked 'L' on the outer link – clockwise moves the guide pulley outboard away from the spokes.

3



4



CHAIN GAP ADJUSTMENT

Chain gap is the distance between the upper guide pulley and the cog the chain is riding on. Optimal chain gap is small enough to allow quick, efficient shifts to and from any cog, but large enough to allow smooth shifts to and from the largest cog.

- Shift chain to the small chain ring.
- While turning the crank, push the rear derailleur inboard by hand to the largest cog.
- Hold the derailleur in this position while making the following adjustment.

- Use a 2.5/3 mm hex wrench (screw driver for SX 4), turn the b-adjust screw until the chain gap equals approximately 6 mm ($\frac{1}{4}$ ") from tip of the cog to tip of upper guide pulley (**Fig. 5**).

- Turn the b-adjust screw clockwise to increase the chain gap.
- Turn the b-adjust screw counterclockwise to decrease the chain gap.

Advice:

- **Bicycles equipped with an 11-28 cassette may require you to set the chain gap at the smallest cog. This is due to the shallow angle of the cassette in relation to the steeper movement of the 9spd rear derailleur.**
- **It is best to measure the rear piece of cable housing between the frame and derailleur after the chain gap is determined. See figure and chart for recommended lengths.**
- **Do not use the b-adjust screw to adjust the rear derailleur to act as a chain-tensioning device or to prevent chain suck. This increases the chain gap causing poor shifting performance.**

INDEX SHIFTING ADJUSTMENT


- Check that the chain and the rear derailleur are in the smallest cog position.
- Measure and cut the rear piece of cable housing. Make sure that it is not too short or long (**see figure and chart**).
- Rotate the rear shifter until the largest number and gear indication tab/dash line up.
- Turn the rear shifter barrel adjust clockwise fully into the shifter, then turn counterclockwise 1 full turn.
- Feed the rear shifter cable through the rear derailleur cable housing, stops and cable guides.
- Feed the rear derailleur cable through the rear derailleur-housing stop and through the cable guide on the fin.
- Pull the cable tight and position it under the cable anchor washer (**Fig. 6**).
- Tighten the 5 mm hex cable anchor bolt to 4 - 5 Nm (35 - 45 in.lbs.).
- Rapidly shift the chain and derailleur up and down the cassette several times. If the cable slips repeat the two former steps.
- Shift the chain to the smallest cog.
- While pedaling, move the shifter up one detent.
– If the chain hesitates or does not shift to the second cog, increase the cable tension by turning the shifter barrel adjuster counterclockwise.
- If the chain shifts beyond the second cog, decrease the cable tension by turning the shifter barrel adjuster clockwise.

X.0 / X-9 / X-7 / SX 5 / SX 4 / 3.0 · REAR DERAILLEURS

ASSEMBLY / MAINTENANCE



5







- Repeat the two former steps until shifting and cable tension is accurate.
- While turning the crank, shift the chain up and down the cassette and chain rings several times to ensure that your derailleur is indexing smoothly.

MAINTENANCE

- Do not use solvents or corrosive materials to clean the components.
- Lubricate the shifting joints regularly (Fig. 7).
- Grease any cable guides (e.g. beneath the bottom bracket

CHART / LENGTH OF CABLE HOUSINGS




Example:

Distance Y = 150 mm → cable housing length L = 165 – 190 mm.


Caution:

It is imperative to respect the values for the correct length of cable housing.

6



7



TROUBLESHOOTING

Problem	Cause	Remedy
Chain jumps from smallest sprocket to frame dropout.	High gear limit screw is not adjusted properly.	Turn in screw H until the guide pulley is aligned with the smallest sprocket.
Difficult or impossible to shift chain onto smallest sprocket.	High gear limit screw is not adjusted properly.	Unscrew screw H until the guide pulley is aligned with the smallest sprocket.
Chain jumps over largest sprocket and falls between the spokes and largest sprocket or inner cage plate scrapes on spokes.	Low gear limit screw is not adjusted properly.	Turn in screw L until the guide pulley is aligned with the largest sprocket.
Delayed shifting.	Rear derailleur or derailleur hanger is bent.	Straighten or replace.
Rough shifting behavior.	Clearance between guide pulley / sprocket is too large.	Adjust b-adjust screw by rotating counterclockwise.
	Clearance between guide pulley / sprocket is too small.	Adjust b-adjust screw by rotating clockwise.
Shifts more gears onto smaller sprockets as intended	Shift cable insufficiently tensioned.	Turn barrel adjuster on the shifter counterclockwise.
Delayed shifting onto larger sprocket	Shift cable insufficiently tensioned.	Turn barrel adjuster on the shifter counterclockwise.
Delayed shifting onto smaller sprocket	Shift cable is too tight.	Turn barrel adjuster on the shifter clockwise.
	Excessive cable friction, pinched or poorly routed cable.	Lubricate or replace cable and housing. Check for excessive bending of cable housing.

X.0 · REAR DERAILLEURS MAINTENANCE

1



PULLEY MAINTENANCE

Advice:

X.0 pulleys use stainless steel balls and races for exceptional durability and corrosion resistance. When riding in wet, muddy, sandy or dusty conditions, periodic maintenance will insure a very long service life.

- Remove the pulleywheel screws (1, **Fig. 1**) using a 2.5 mm allen key. Make sure to fully engage the key in the 2.5 mm hex hole.
- Remove the aluminum covers (2) from both sides of the pulleywheels.
- Clean all parts carefully and give the bearings a spin to make sure they run smoothly.
- If not, remove the black rubber seal from one side of the bearing (**Fig. 2**), clean the bearing thoroughly and repack with a quality waterproof grease, then replace the rubber seal by pressing it into place.
- When assembling the covers to the pulleywheel, fill the gap between bearing and covers with a quality waterproof grease.
- Tightening torque of the pulleywheel screws is 2.5 Nm.
- If pulleys or bearings are damaged, replace with new SRAM X.0 pulleys, which come complete with new bearings and aluminum covers.

Advice:

*X.0 cage plates have 3 mounting holes (**Fig. 6**). The lowest spring tension position offers ideal tension for all around XC riding.*

Higher spring tension holes are only recommended after extensive use has reduced the spring's stiffness.

- Wind the cage counterclockwise to tension the spring. The cage can not be fully installed into the derailleur body until the cage is at the same position as when it was originally removed (**Fig. 4**).
- After the cage is fully installed in the derailleur body, continue to rotate the cage counterclockwise until you can access the cage stop screw hole.
- A helping hand holding the cage makes the installation of the 2.5 mm stop screw easier (**Fig. 3**). Tightening torque of the cage stop is 1,5 Nm (13 in.lbs.).

2



CAGE PIVOT MAINTENANCE / CAGE SPRING TENSION ADJUSTMENT

- Hold the cage in an extended position so you can reach the cage stop screw on the outside of the cage (**Fig. 3**).

Advice:

Disassembly and assembly of the cage stop screw are easier if there is a second helping hand!

- Make sure to firmly hold the whole assembly when unthreading the 2.5 mm cage stop screw (**Fig. 3**).
- Now slowly unwind the cage (clockwise) one turn to relieve spring tension.
- Remove the cage and spring. The cage must be rotated to the position shown in **Figure 4** to remove it from the derailleur body.
- Clean thoroughly the shaft, cage plate, derailleur body and spring.
- Re-grease the shaft, spring tab and spring supports with a quality waterproof grease.
- Reinstall the spring and cage (**Fig. 5**). There are several cavities in the derailleur body, but only one is designed for installing the spring tab. Be certain to use the correct cavity.

3



X.0 · REAR DERAILLEURS MAINTENANCE



4



TROUBLESHOOTING

Problem	Cause	Remedy
Chain jumps from smallest sprocket to frame dropout.	High gear limit screw is not adjusted properly.	Turn in screw H until the guide pulley is aligned with the smallest sprocket.
Difficult or impossible to shift chain onto smallest sprocket.	High gear limit screw is not adjusted properly.	Unscrew screw H until the guide pulley is aligned with the smallest sprocket.
Chain jumps over largest sprocket and falls between the spokes and largest sprocket or inner cage plate scrapes on spokes.	Low gear limit screw is not adjusted properly.	Turn in screw L until the guide pulley is aligned with the largest sprocket.
Delayed shifting.	Rear derailleur or derailleur hanger is bent.	Straighten or replace.
Rough shifting behavior.	Clearance between guide pulley / sprocket is too large.	Adjust b-adjust screw by rotating counterclockwise.
Shifts more gears onto smaller sprockets as intended	Clearance between guide pulley / sprocket is too small.	Adjust b-adjust screw by rotating clockwise.
Delayed shifting onto larger sprocket	Shift cable insufficiently tensioned.	Turn barrel adjuster on the shifter counterclockwise.
Delayed shifting onto smaller sprocket	Shift cable is too tight.	Turn barrel adjuster on the shifter clockwise.
	Excessive cable friction, pinched or poorly routed cable.	Lubricate or replace cable and housing. Check for excessive bending of cable housing.

5



6



SRAM ESP · REAR DERAILLEURS


TECHNICAL DATA / ASSEMBLY REQUIREMENTS




SRAM ESP

SRAM ESP	
Compati.	Speeds 8 / 7
	Shifter Compatibility SRAM 1:1 Actuation Ratio 8 / 7 speed shifters
	Cogsets & Chains SRAM / IG & HG 8/7spd
	Chainrings 22-32-42/44, 24-34-46, 26-36-46/48
Chain Capacity	Total 45T
	Cage Length Long
	Max Sprocket 34T
	Min Sprocket 11T
Design	Front Difference 22T
	Spring Enhancement Yes
	Pulleys Bushing
	Direct Mount Yes
	Cable & Housing 1, 1 or 1.2 mm high quality cables, 4 or 5 mm compressionless cable housing with end cap / maximum diameter of 5.8 mm
	Weight 239 g
	Knuckles Grilon Composite
	Outer Link Grilon Composite
	Inner Link Steel / Zinc Coat
	Outer Cage Grilon Composite
	Inner Cage Grilon Composite
	Hanger Bolt Steel


1



2



DERAILLEUR ANATOMY

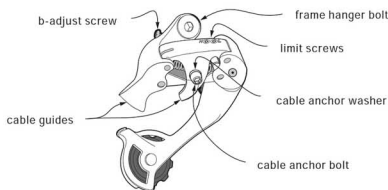

FRAME DIMENSIONS

(see figure 1 and 2)


- For optimal 1:1 Actuation Ratio rear derailleur performance, the recommended rear derailleur hanger length (L) should be 28 – 30 mm.

- For a given L, use the chart below to determine other 1:1 Actuation Ratio rear derailleur hanger specifications.


L	X	A	R1	R2	T
28	6 – 10	25° – 30°	8.5 max	11.5 – 13.5	7 – 8
30	7.5 – 10	25° – 30°	8.5 max	11.5 – 13.5	7 – 8

SRAM ESP · REAR DERAILLEURS ASSEMBLY


1




2



3



4



ASSEMBLY

Advice:

Check the rear derailleur hanger alignment. A bent rear derailleur hanger will result in inaccurate index shifting. Outboard side impacts are the most common causes of this type of damage.

- Attach the rear derailleur to the frame's rear derailleur hanger using a 5 mm hex head wrench (**Fig. 1**).
- Check that the b-adjust screw is clear of the rear derailleur dropout tab (**Fig. 2**).
- Tighten the 5 mm hex hanger bolt to 8 - 10 Nm (70 - 85 in.lbs.) (**Fig. 1**).

CHAIN LENGTH

A properly measured chain will prevent damage in case of accidentally shifting to the largest chain ring and cog combination. This type of accidental shifting may cause harmful binding or seizure of the chain and potentially cause severe damage.

- Bypassing the rear derailleur, run the chain around the largest cog/large chainring combination (**Fig. 3**).
– For rear suspension frames, position the rear suspension for the greatest chain length required.
- Add 2 LINKS or 1 link + Connecting Link to this length for proper chain length.

LIMIT SCREWS ADJUSTMENT

- View the rear derailleur and pulleys from behind the rear of the bicycle (**Fig. 4**).
- Using a small screwdriver, turn the limit screw marked 'H' on the outer link of the derailleur to align the upper guide pulley center with the outboard edge of the smallest cog – clockwise moves the guide pulley inboard towards the wheel.
- While turning the crank, push the rear derailleur towards the larger cogs by hand.
- Align the upper guide pulley under the largest cog, center to center, by turning the limit screw marked 'L' on the outer link – clockwise moves the guide pulley outboard away from the spokes.

CHAIN GAP ADJUSTMENT

Chain gap is the distance between the upper guide pulley and the cog the chain is riding on. Optimal chain gap is small enough to allow quick, efficient shifts to and from any cog, but large enough to allow smooth shifts to and from the largest cog.

- Shift chain to the small chain ring.
- While turning the crank, push the rear derailleur inboard by hand to the largest cog.
- Hold the derailleur in this position while making the following adjustment:

- Use a 3 mm hex wrench, turn the b-adjust screw until the chain gap equals approximately 6 mm ($1/4$ ") from tip of the cog to tip of upper guide pulley (**Fig. 5**).

- Turn the b-adjust screw clockwise to increase the chain gap.
- Turn the b-adjust screw counterclockwise to decrease the chain gap.


Advice:

- **Bicycles equipped with an 11-28 or 14-28 cassette may require you to set the chain gap at the smallest cog. This is due to the shallow angle of the cassette in relation to the steeper movement of the rear derailleur.**
- **Precision index shifting may require small changes of the b-adjustment while setting the proper cable tension.**
- **Do not use the b-adjust screw to adjust the rear derailleur to act as a chain-tensioning device or to prevent chain suck. This increases the chain gap causing poor shifting performance.**

INDEX SHIFTING ADJUSTMENT

- Check that the chain and the rear derailleur are in the smallest cog position.
- Measure and cut the rear piece of cable housing. Make sure that it is not too short or long.
- Rotate the rear shifter until the largest number and gear indication tab/dash line up.
- Turn the rear shifter barrel adjust clockwise fully into the shifter, then turn counterclockwise 1 full turn.
- Feed the rear shifter cable through the rear derailleur cable housing, stops and cable guides.
- Thread the rear derailleur cable through the rear derailleur-housing stop and through the cable guide on the fin (**Fig. 6**).
- Pull the cable tight and position it under the cable anchor washer (**Fig. 6**).
- Tighten the 5 mm hex cable anchor bolt to 4 - 5 Nm (35 - 45 in.lbs.)
– Be careful not to crush or deform the cable.
- Rapidly shift the chain and derailleur up and down the cassette several times. If the cable slips repeat the two former steps.
- Shift the chain to the smallest cog.
- While pedaling, move the shifter up one detent.
– If the chain hesitates or does not shift to the second cog, increase the cable tension by turning the shifter barrel adjuster counterclockwise.
- If the chain shifts beyond the second cog, decrease the cable tension by turning the shifter barrel adjuster clockwise.

5




- Repeat the two former steps until shifting and cable tension is accurate.
- While turning the crank, shift the chain up and down the cassette and chain rings several times to ensure that your derailleur is indexing smoothly.


MAINTENANCE

- Do not use solvents or corrosive materials to clean the components.
- Lubricate the shifting joints regularly (**Fig. 7**).
- Grease any cable guides (e.g. beneath the bottom bracket).

6



7



TROUBLESHOOTING

Problem	Cause	Remedy
Chain jumps from smallest sprocket to frame dropout.	High gear limit screw is not adjusted properly.	Turn in screw H until the guide pulley is aligned with the smallest sprocket.
Difficult or impossible to shift chain onto smallest sprocket.	High gear limit screw is not adjusted properly.	Unscrew screw H until the guide pulley is aligned with the smallest sprocket.
Chain jumps over largest sprocket and falls between the spokes and largest sprocket or inner cage plate scrapes on spokes.	Low gear limit screw is not adjusted properly.	Turn in screw L until the guide pulley is aligned with the largest sprocket.
Delayed shifting.	Rear derailleur or derailleur hanger is bent.	Straighten or replace.
Rough shifting behavior.	Clearance between guide pulley / sprocket is too large.	Adjust b-adjust screw by rotating counterclockwise.
Shifts more gears onto smaller sprockets as intended	Clearance between guide pulley / sprocket is too small.	Adjust b-adjust screw by rotating clockwise.
Delayed shifting onto larger sprocket	Shift cable insufficiently tensioned.	Turn barrel adjuster on the shifter counterclockwise.
Delayed shifting onto smaller sprocket	Shift cable is too tight.	Turn barrel adjuster on the shifter clockwise.
	Excessive cable friction, pinched or poorly routed cable.	Lubricate or replace cable and housing. Check for excessive bending of cable housing.

X-9 / X-7 / 3.0 · HIGH CLAMP FRONT DERAILLEURS


TECHNICAL DATA / ASSEMBLY REQUIREMENTS



X-9
X-7
3.0

	X-9 High Clamp NEW	X-7 High Clamp NEW	3.0
Clamp Size	28.6 mm	—	—
	31.8 mm	original	original
	34.9 mm	original	original
	34.9 mm	original	original
Rear Compatibility	9spd	9spd	8spd / 7spd
Index Compatibility	Yes	Yes	Yes
Total Capacity	22T	22T	20T
Top-Middle Min. Capacity	min. 12T	min. 12T	min. 10T
Top Gear Teeth	44T or 48T	44T or 48T	42T or 48T
Cable Routing	Top Pull Type	Bottom Pull Type	Twin Pull Type (Top and Bottom Pull)
Chainstay Angle	66° – 69°	66° – 69°	66° – 69°
Mount Type	High Clamp	High Clamp	High Clamp
Chain Line	47.5 – 51 mm	47.5 – 51 mm	47.5 – 51 mm
Weight	164 g (ø 31.8 mm) / 166 g (ø 34.9 mm)	185 g	210 g
Band Material	Aluminum, forged	Aluminum	Steel
Outer Link	Aluminum	Aluminum	Steel
Inner Link	Aluminum	Aluminum	Steel
Link Bushing	Outer Sealed	Outer Sealed	Bushing
Chain Cage	Steel Chrome Plated	Steel Chrome Plated	Steel Chrome Plated
Color	Silver, polished or clear coated	Silver or black painted	Black

1



FRAME DIMENSIONS

(see Fig. 1)

- For Top Pull version: upper cable stop should be positioned 300 – 350 mm above bottom bracket center.
- The seat tube should be positioned in the center of the bottom bracket shell.

Chainstay angle:

$\alpha = 66^\circ - 69^\circ$.

Chainline:


47.5 – 51 mm.

(Measurement from the center of the bracket to the center of middle chainring.)

Length of chainstay:

- MTB/Trekking L > 420 mm.
- Rear frame alignment must be symmetrical.

2



NECESSARY CLEARANCE


(see Fig. 2)

Be sure to leave enough clearance between bottle cage holes and clamp location.

Necessary clearance see Fig. 2		X-9 High Clamp 44T	X-9 High Clamp 48T	X-7 High Clamp 44T
Clamp band position	A	130 mm	135 mm	130 mm
	B	152 mm	157 mm	152 mm
	C	100 mm	105 mm	100 mm
Tire clearance	D	22 mm (Top Pull) / 36 mm Bottom Pull		38 mm
		X-7 High Clamp 48T	3.0 42T	3.0 48T
Clamp band position	A	135 mm	114 mm	119 mm
	B	157 mm	128 mm	133 mm
	C	105 mm	107 mm	112 mm
Tire clearance	D	38 mm	43 mm	43 mm

X-9 / X-7 / 3.0 · HIGH CLAMP FRONT DERAILLEURS ASSEMBLY

1



ASSEMBLY

- Attach the front derailleur to the seat tube.
- Adjust the position along the seat tube so that clearance between the front derailleur cage and the large chainring is 1 – 3 mm (**Fig. 1**).

At the same time, align the front derailleur cage outer plate to be parallel with the chainrings (**Fig. 2**).


- Tighten the 5 mm hex clamp bolt to 5 – 7 Nm (44 – 62 in.lbs.) for X-9 / X-7 or 8 Nm (70 in.lbs.) for 3.0.

INDEX SHIFTING ADJUSTMENT

(see **Fig. 7**)

Shift the chain onto the largest rear sprocket and middle chainring – if the chain scrapes against the inner cage plate, turn the adjusting barrel on the shifter clockwise until the chain shifts smoothly and free of obstruction.

2



LOW LIMIT ADJUSTMENT


(see **Fig. 3**)

- Place the chain on the largest rear cog and the smallest front chainring.
- Adjust the low limit screw (**Fig. 3**) so that the chain is positioned close to the inner cage plate without actually touching it.

CONNECTING CABLE

- Check that the chain and the front derailleur are in the smallest chainring position.
- Place the front shifter in gear position '1'.
- Turn the front shifter barrel adjuster clockwise fully into the shifter, then turn counterclockwise 1 full turn.
- Feed the front shifter cable through the cable housing and stops.
- Run the cable under the cable anchor washer and hold taut.
 - Top pull (**Fig. 4**).
 - Bottom pull (**Fig. 5**).
- Tighten the 5 mm hex cable anchor bolt to 5 Nm (44 in.lbs.).
- Shift the chain up and down the chainrings several times to take out initial slack in the cable.
- If necessary re-tension the cable and tighten cable anchor bolt.

3




HIGH LIMIT ADJUSTMENT

(see **Fig. 6**)

- Set the chain to the smallest rear cog and the largest front chainring.
- Adjust the high limit screw so that clearance between the front derailleur cage outer plate and the chain is 0 – 0.5 mm.

4




3.0 Top Pull

X-9 / X-7 / 3.0 · HIGH CLAMP FRONT DERAILLEURS ASSEMBLY / MAINTENANCE



5

5 mm
5 Nm
44 in.lbs.




X-9 / X-7 Bottom Pull




3.0 Bottom Pull


6



7



8



ADVICE

Avoid using extreme gear combinations as these combinations cause noise and excessive wear!



MAINTENANCE

- Do not use solvents or corrosive materials to clean the components.
- Lubricate the shifting joints regularly (**Fig. 8**).
- Grease any cable guides (e.g. beneath the bottom bracket).

TROUBLESHOOTING

Problem	Cause	Remedy
Shifter actuated, chain fails to change chainring.	Shift cable incorrectly clamped.	Check shift cable and correct as necessary (cable clamp; cable housing stops; cable recess in shifter; cable tension).
	High / low limit screw poorly adjusted.	Correct limit screws.
	Clearance between cage and large chainring is too big / small.	Correct position (1 – 3 mm).
Chain falls over large / small chainring.	High / low limit screw poorly adjusted.	Correct limit screws.
Force required to actuate gears is too high.	Excessive cable friction, pinched or poorly routed cable.	Lubricate or replace cable and housing. Check for excessive bending of cable housing.
Crank collides with front derailleur.	High gear limit screw incorrectly adjusted.	Correct high limit screw.
	Cage not parallel with chainring.	Correct the front derailleur position.

X-9 / X-7 · LOW CLAMP FRONT DERAILLEURS


TECHNICAL DATA / ASSEMBLY REQUIREMENTS



X-9
X-7

Design	Clamp Size	NEW	
		X-9 Low Clamp	X-7 Low Clamp
	28.6 mm	—	—
	31.8 mm	original	with band adaptor
	34.9 mm	original	original
	Rear Compatibility	9spd	9spd
	Index Compatible	Yes	Yes
	Total Capacity	22T	22T
	Top-Middle Min. Capacity	min. 12T	min. 12T
	Top Gear Teeth	44T or 48T	44T or 48T
	Cable Routing	Top Pull Type	Bottom Pull Type
	Chainstay Angle	66° – 69°	66° – 69°
	Mount Type	Low Clamp	Low Clamp
	Chain Line	51 mm	47.5 – 51 mm
	Weight	155 g	175 g (without adaptor) / 180 g (with adaptor)
	Band Material	Aluminum, forged	Aluminum
	Outer Link	Steel	Steel
	Inner Link	Aluminum, forged	Aluminum
	Link Bushing	Outer Sealed	Outer Sealed
	Chain Cage	Steel Chrome Plated	Steel Chrome Plated
	Color	Polished and clear coated	Silver or black painted

1



FRAME DIMENSIONS

(see Fig. 1)

- For Top Pull version: upper cable stop should be positioned 300 – 350 mm above bottom bracket center.
- The seat tube should be positioned in the center of the bottom bracket shell.

Length of chainstay:

- MTB/Trekking L > 420 mm.
- Rear frame alignment must be symmetrical.


Chainstay angle:

$\alpha = 66^\circ - 69^\circ$.

Chainline:

X-9: 51 mm / X-7: 47.5 – 51 mm
(Measurement from the center of the bracket to the center of middle chainring.)

2



NECESSARY CLEARANCE


(see Fig. 2)

Be sure to leave enough clearance between bottle cage holes and clamp location.


Necessary clearance see Fig. 2		X-9 Low Clamp 44T	X-9 Low Clamp 48T
Clamp position	A	69 mm	74 mm
	B	86 mm	91 mm
	C	71 mm	76 mm
Tire clearance	D	42 mm	42 mm
		X-7 Low Clamp 44T	X-7 Low Clamp 48T
Clamp position	A	69 mm	74 mm
	B	86 mm	91 mm
	C	69 mm	74 mm
Tire clearance	D	43 mm	43 mm

X-9 / X-7 · LOW CLAMP FRONT DERAILLEURS ASSEMBLY


1




2



3



4



ASSEMBLY

- Attach the front derailleur to the seat tube.
- Adjust the position along the seat tube so that clearance between the front derailleur cage and the large chainring is 1 - 3 mm (**Fig. 1**).
- At the same time, align the front derailleur cage outerplate to be parallel with the chainrings (**Fig. 2**).
- Tighten the 5 mm hex bolt to 5 - 7 Nm (44 - 62 in.lbs.).
- Remove the mounting aid (piece of plastic - **Fig. 2**).

INDEX SHIFTING ADJUSTMENT (see Fig. 7)

Shift the chain onto the largest rear sprocket and middle chainring - if the chain scrapes against the inner cage plate, turn the adjusting barrel on the shifter clockwise until the chain shifts smoothly and free of obstruction.

LOW LIMIT ADJUSTMENT (see Fig. 3)

- Place the chain on the largest rear cog and the smallest front chainring.
- Adjust the low limit screw (**Fig. 3**) so that the chain is positioned close to the inner cage plate without actually touching it.





CONNECTING CABLE

- Check that the chain and the front derailleur are in the smallest chainring position.
- Place the front shifter in gear position '1'.
- Turn the front shifter barrel adjuster clockwise fully into the shifter, then turn counterclockwise 1 full turn.
- Feed the front shifter cable through the cable housing and stops.
- Run the cable under the cable anchor washer and hold taut.
 - Top pull (**Fig. 4**).
 - Bottom pull (**Fig. 5**).
- Tighten the 5 mm hex cable anchor bolt to 5 Nm (44 in.lbs.).
- Shift the chain up and down the chainrings several times to take out initial slack in the cable.
- If necessary re-tension the cable and tighten cable anchor bolt.

HIGH LIMIT ADJUSTMENT (see Fig. 6)

- Set the chain to the smallest rear cog and the largest front chainring.
- Adjust the high limit screw so that clearance between the front derailleur cage outer plate and the chain is 0 - 0.5 mm.

X-9 / X-7 · LOW CLAMP FRONT DERAILLEURS ASSEMBLY / MAINTENANCE



ADVICE

Avoid using extreme gear combinations as these combinations cause noise and excessive wear!



MAINTENANCE

- Do not use solvents or corrosive materials to clean the components.
- Lubricate the shifting joints regularly (**Fig. 8**).
- Grease any cable guides (e.g. beneath the bottom bracket).

TROUBLESHOOTING

Problem	Cause	Remedy
Shifter actuated, chain fails to change chainring.	Shift cable incorrectly clamped.	Check shift cable and correct as necessary (cable clamp; cable housing stops; cable recess in shifter; cable tension).
	High / low limit screw poorly adjusted.	Correct limit screws.
	Clearance between cage and large chainring is too big / small.	Correct position (1 – 3 mm).
Chain falls over large / small chainring.	High / low limit screw poorly adjusted.	Correct limit screws.
Force required to actuate gears is too high.	Excessive cable friction, pinched or poorly routed cable.	Lubricate or replace cable and housing. Check for excessive bending of cable housing.
Crank collides with front derailleur.	High gear limit screw incorrectly adjusted.	Correct high limit screw.
	Cage not parallel with chainring.	Correct the front derailleur position.

X.0 / X-9 / X-7 / ROCKET / ATTACK · TWIST SHIFTERS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS



X · 0 · X · 9

	X.0			X-9	
	Version	Shorty	Shorty	Shorty	Shorty
Com- pat- ibility	Shifter Type	Front / Micro adjust	Front / Index	Rear 1:1 Actuation Ratio	Front / Micro adjust
	Speeds	3	9	8	3
	Derailleur	SRAM & Shimano	SRAM & Shimano	SRAM 1:1 Actuation Ratio	SRAM & Shimano
	Crankset	Triple Indexed	Triple Indexed	Triple Indexed	Triple Indexed
	Cable Pull Release	SRS	SRS	SRS	SRS
	Cable	Stainless Steel	←	Teflon Coat. Stainl. Steel	Stainless Steel
	Gear Indication	Window	Window	Window	Window
	Barrel Adjuster	Indexing	Indexing	Indexing	Indexing
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm	22.3 mm
	Shifter Length	70 mm	←	←	70 mm

X · 9 · X · 7 · ROCKET

	X-9		X-7		Rocket
	Version	Shorty	Shorty	Shorty	Shorty
Com- pat- ibility	Shifter Type	Rear 1:1 Actuation Ratio	Front / Micro adjust	Front / Index	Rear 1:1 Actuation Ratio
	Speeds	9	8	3	9
	Derailleur	SRAM 1:1 Actuation Ratio	SRAM & Shimano	SRAM & Shimano	SRAM 1:1 Actuation Ratio
	Crankset	Triple Indexed	Triple Indexed	Triple Indexed	Triple Indexed
	Cable Pull Release	SRS	SRS	SRS	SRS
	Cable	Stainless Steel	Stainless Steel	←	←
	Gear Indication	Window	Window	Window	Window
	Barrel Adjuster	Indexing	Indexing	Indexing	Indexing
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm	22.3 mm
	Shifter Length	70 mm	70 mm	←	←

ROCKET ATTACK


	Rocket		Attack	
	Version	Shorty	Shorty	Shorty
Com- pat- ibility	Shifter Type	Front / Index	Rear 2:1	Front / Micro adjust
	Speeds	3	9	8
	Derailleur	SRAM & Shimano	Shimano	SRAM & Shimano
	Crankset	Triple Indexed	Triple Indexed	Triple Indexed
	Cable Pull Release	SRS	SRS	SRS
	Cable	Stainless Steel	←	←
	Gear Indication	Window	Window	Window
	Barrel Adjuster	Indexing	Indexing	Indexing
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm
	Shifter Length	70 mm	←	←

CABLE HOUSING


- Use only new high quality cable and compressionless cable housing with end caps.
- When choosing cable housing lengths, be sure to allow enough housing for an extreme turn of the handlebars in both directions.
- Note also, that different stem lengths and cable stop positions effects cable housing length.

X.0 / X-9 / X-7 / ROCKET / ATTACK · TWIST SHIFTERS ASSEMBLY / MAINTENANCE


1




2




3



4



SHIFTER ANATOMY

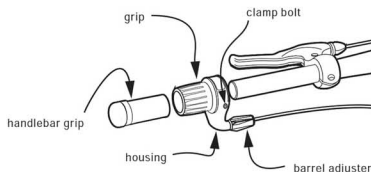

ASSEMBLY

Front and Rear:

- Slide the shifter onto the handlebar.
 - If necessary, move the brake lever to allow for shifter and handlebar grip.
 - Bar end users – don't forget to leave room for the bar end.
- Rotate the shifter until the barrel adjuster is beneath (but out of the way of) the brake lever.
- Tighten the 3 mm hex clamp bolt (1, **Fig. 1**) to 1.9 Nm (17 in.lbs.).
- Slide the handlebar grip onto the handlebar.

Caution:

Never use lubricants or solvents to install handlebar grips. Handlebar grips provide safety function.

For this reason, they should be mounted in such a way as to make sure they do not slip off handlebar!

- Feed the cable through the cable housing and stops.
- Attach cable to the derailleur.
- Adjust indexing per derailleur instruction.

Caution:

- **Always check the front and rear brake levers for proper operation.**
- **If there is interference between shifters and brake levers, re-adjust lever and shifter placement.**
- **Check again for proper operation!**

CABLE CHANGE


Advice:

- **Leave the shifter on the handlebar.**
- **No need to move other components. The shifter does not need to be opened.**
- **Use only new high quality cable and compressionless cable housing with end caps.**

Front and Rear:

- Detach the cable from the derailleur.
- Cut cable off 15 cm (6") from shifter barrel adjuster. Discard old cable and cable housing.
- From the edge (2, **Fig. 1**), pull open the cable change hatch. The hinge of the hatch should remain attached to the shifter.
- Rotate the shifter fully in the cable release direction (3). (Gear "1" on the front shifter or HIGHEST gear number on the rear shifter.)
- Look for cable head entry (**Fig. 2**).
- Using a small flat head screw driver, push back the tab (1, **Fig. 2**) covering the cable head.
- Push cable up/out of the shifter and discard.
- Feed the new cable through the cable entry and out the barrel adjuster.
- Pull cable snug to seat cable head under tab.
- Replace cable change hatch.
- Feed the cable through the new cable housing and frame stops.
- Attach cable to the derailleur.
- Adjust indexing per derailleur instruction.

5



GRIP REPLACEMENT

Advice:

Do not remove the triangular housing cover to make the change.


Removal:

- Rotate the shifter fully in the cable release direction (3, **Fig. 1**). (Gear "1" on the front shifter or HIGHEST gear number on the rear shifter.)
- Using a 3 mm hex wrench (1, **Fig. 1**), remove shifter from the handlebar.
- While holding shifter housing and grip together in one hand, remove axial fixture ring (1, **Fig. 3**) by squeezing together housing tabs (2).
- While pushing/rotating the grip lightly forward (release direction), slowly move the grip outward away from housing.
 - Pulling the grip quickly may cause the coil spring (1, **Fig. 4**) to move out of position.

Replacement:

- Replace front end of coil spring (1, **Fig. 4**) on to tab in groove if necessary.
- While sliding grip up towards the housing, align spring tab so that it catches the open end of the coil spring.
- Rotate grip forward slightly compressing the coil spring and engage grip and tab into the housing.
- Replace axial fixture ring (1, **Fig. 3**) over housing tabs (2).

6



INTERNAL CLEANING

Advice:

When shifting performance is compromised, try replacing the cable and housing before you disassemble the shifter for cleaning.

Disassembly:

- Follow "GRIP REPLACEMENT / Removal".
- Remove lens cover (4, **Fig. 1**).
- Remove gear indicator needle (3) by pulling straight out.
- Remove the spool's coil spring (1, **Fig. 4**).
- Using small pliers, pull leaf spring (2) straight out. Take note of the shape of the spring so that you can replace it in the correct direction.
- Remove housing cover screw (5, **Fig. 1**). Slide housing cover (1, **Fig. 5**) and spool (2) out at the same time being careful not to break the tab (3) on the cover.
- Clean all parts with soapy water only.
- Using only Grip Shift Jonnisnot, grease housing tube, detentes and cable track at housing bend.

Reassembly:

- Slip tab (3, **Fig. 5**) on housing cover into groove (4) on spool.
- Slide spool and cover into housing and install cover screw (5, **Fig. 1**).
- Place leaf spring (2, **Fig. 4**) into spool. Push down slightly on opposite end of spring, then seat spring completely into spool and housing.
- Follow "GRIP REPLACEMENT / Replacement".
- Rotate shifter to full release position.
- Install gear indication needle (1, **Fig. 6**) in slot (2).
- Replace gear indicator lens (4, **Fig. 1**) and screws.
- Install shifter on to bars and check for proper function.

SX 5 / CENTERA · TWIST SHIFTERS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

SX 5

SX 5				
Com- pat- i- bi- li- ty	Version	Shorty	Shorty	Shorty
	Shifter Type	Front / Micro adjust	Front / Index	Rear 1:1 Actuation Ratio
	Speeds		3	9
	Derailleur	SRAM & Shimano	SRAM & Shimano	SRAM 1:1 Actuation Ratio
	Crankset	Triple Indexed	Triple Indexed	SRAM 1:1 Actuation Ratio
	Cable Pull Release	FFS	FFS	Standard
	Cable	Die Drawn Steel	←	←
	Gear Indication	Printed	Printed	Printed
	Barrel Adjuster	Indexing	Indexing	Indexing
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm
Weight	Shifter Length	65 mm	←	←
	Weight	N/A	N/A	N/A


CENTERA

Centera				
Com- pat- i- bi- li- ty	Version	Shorty	Shorty	Shorty
	Shifter Type	Front / Micro adjust	Front / Index	Rear 2:1
	Speeds		3	9
	Derailleur	SRAM & Shimano	SRAM & Shimano	Shimano
	Crankset	Triple Indexed	Triple Indexed	
	Cable Pull Release	FFS	FFS	Standard
	Cable	Die Drawn Steel	←	←
	Gear Indication	Printed	Printed	Printed
	Barrel Adjuster	Indexing	Indexing	Indexing
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm
Weight	Shifter Length	65 mm	←	←
	Weight	N/A	N/A	N/A


CABLE HOUSING

- Use only new high quality cable and compressionless cable housing with end caps.
- When choosing cable housing lengths, be sure to allow enough housing for an extreme turn of the handlebars in both directions.
- Note also, that different stem lengths and cable stop positions effects cable housing length.


SHIFTER ANATOMY

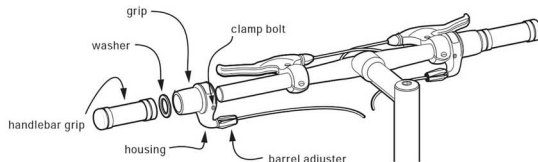



1



2



3



ASSEMBLY

Front and Rear:

- Slide the shifter onto the handlebar.
 - If necessary, move the brake lever to allow for shifter and handlebar grip.
 - Bar end users – don't forget to leave room for the bar end.
- Rotate the shifter until the barrel adjuster is beneath (but out of the way of) the brake lever.
- Tighten the 3 mm hex clamp bolt to 1.9 Nm (17 in.lbs.).
- Slide the plastic washer onto the handlebar.
- Slide the handlebar grip onto the handlebar.

Caution:

Never use lubricants or solvents to install handlebar grips. Handlebar grips provide safety function. For this reason, they should be mounted in such a way as to make sure they do not slip off handlebar!

- Feed the cable through the cable housing and stops.
- Attach the shifter cable to the derailleur.
- Adjust indexing per derailleur instructions.

Caution:

- Always check the front and rear brake levers for proper operation.**
- If there is interference between shifters and brake levers, re-adjust lever and shifter placement.**
- Check again for proper operation!**

CABLE CHANGE

Front and Rear:

Advice:

- Leave the shifter on the handlebar.**
- No need to move other components. The shifter does not need to be opened.**
- Use only new high quality cable and compressionless cable housing with end caps.**
- Detach the cable from the derailleur.
- Cut the cable off 15 cm (6") from shifter barrel adjuster. Discard old cable and cable housing.
- Remove the escape hatch (**Fig. 1**).
- Rotate the shifter so the indicator mark is aligned with the highlighted number. Look for the cable entry.
- Only Rear shifter:** remove the 2.5 mm hex cable retention screw (**Fig. 2**).
- Remove and discard the rest of the old cable.
- Feed the new cable through the cable entry and out the barrel adjuster. Pull the cable snug.
- Only Rear shifter:** replace the cable retention screw – be sure to turn until the screw contacts the cable head.
- Replace the escape hatch.
- Feed the cable through the new cable housing and stops.
- Attach the cable to the derailleur and adjust indexing per derailleur instruction.

MAINTENANCE

- Clean all shifter parts using only water and mild soap.**
- Use only Grip Shift Jonnisnot Grease for any shifter lubrication.**
- After proper cleaning relubricate the areas shown in Fig. 3.**

SX 4 / MRX PRO · TWIST SHIFTERS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

SX 4

SX 4		Half Pipe	Half Pipe	Half Pipe	Half Pipe	Half Pipe
Com- pat- tibil- ity	Version	Half Pipe	Half Pipe	Half Pipe	Half Pipe	Half Pipe
	Shifter Type	Front / Micro adjust	Front / Index	Rear 1:1 Actuation Ratio	Rear 1:1 Actuation Ratio	Rear 1:1 Actuation Ratio
	Speeds	3	3	9	8	7
	Derailleur	SRAM & Shimano	SRAM & Shimano	SRAM 1:1 Actuation Ratio		
	Crankset	Triple Indexed	Triple Indexed			
	Cable Pull Release	SRS	SRS	SRS	SRS	SRS
	Cable	Die Drawn Steel	←	←	←	←
	Gear Indication	Window	Window	Window	Window	Window
	Barrel Adjuster	Indexing	Indexing	Indexing	Indexing	Indexing
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm	22.3 mm	22.3 mm
	Shifter Length	86 mm	←	←	←	←
	Weight	87 g	87 g	87 g	87 g	87 g


MRX PRO

MRX Pro		Half Pipe	Half Pipe	Half Pipe	Half Pipe	Half Pipe	Half Pipe	Half Pipe
Com- pat- tibil- ity	Version	Half Pipe	Half Pipe	Half Pipe	Half Pipe	Half Pipe	Half Pipe	Half Pipe
	Shifter Type	Front / Micro adjust	Front / Index	Rear 2:1			Rear Shimano Rapid Rise	
	Speeds	3	3	9	8	7	9	8
	Derailleur	SRAM & Shimano	SRAM & Shimano	Shimano			Shimano Rapid Rise	
	Crankset	Triple Indexed	Triple Indexed					
	Cable Pull Release	SRS	SRS	SRS			SRS	
	Cable	Die Drawn Steel	←	←			←	
	Gear Indication	Window	Window	Window			Window	
	Barrel Adjuster	Indexing	Indexing	Indexing			Indexing	
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm			22.3 mm	
	Shifter Length	86 mm	←	←			←	
	Weight	87 g	87 g	87 g			87 g	

CABLE HOUSING

- Use only new high quality cable and compressionless cable housing with end caps.
- When choosing cable housing lengths, be sure to allow enough housing for an extreme turn of the handlebars in both directions.
- Note also, that different stem lengths and cable stop positions effects cable housing length.

SHIFTER ANATOMY

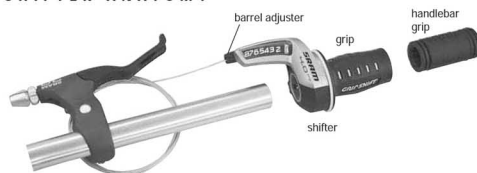

SX 4 / MRX PRO · TWIST SHIFTERS ASSEMBLY / MAINTENANCE



ASSEMBLY

Front and Rear:

- Slide the shifter onto the handlebar.
 - If necessary, move the brake lever to allow for shifter and handlebar grip.
 - Bar end users – don't forget to leave room for the bar end.
- Rotate the shifter until the barrel adjuster is above (but out of the way of) the brake lever and the gear indication is clearly visible from the riding position.
- Tighten the 2.5 mm hex clamp bolt (**Fig. 1**) to 1.7 Nm (15 in.lbs.).
- Slide the handlebar grip onto bar (**Fig. 2**).

Caution:

Never use lubricants or solvents to install handlebar grips. Handlebar grips provide safety function.

For this reason, they should be mounted in such a way as to make sure they do not slip off handlebar!

- Feed the cable through the cable housing and frame stops.
- Attach cable to the derailleur.
- Adjust indexing per derailleur instructions.

Caution:

Not recommended for use on thin walled aluminum handlebars such as Hyperlite® type handlebars or Carbon handlebars.

Caution:

- Always check the front and rear brake levers for proper operation.
- If there is interference between shifters and brake levers, re-adjust lever and shifter placement.
- Check again for proper operation!

CABLE CHANGE

Advice:

- Leave the shifter on the handlebar.
- No need to move other components. The shifter does not need to be opened.
- Use only new high quality cable and compressionless cable housing with endcaps.
- Detach the cable from the derailleur.
- Cut the cable off 6" (15 cm) from the shifter barrel adjuster.
- Discard the old cable and cable housing.
- Line up the "1" (front) or HIGHEST gear number (rear) mark with the indicator mark (MRX Pro Shimano Rapid Rise® Gear number "1" for front and rear). Look for the cable entry.
- Push cable up/out of the shifter and discard (**Fig. 3**).
- Feed the new cable through the cable entry and out the barrel adjuster (**Fig. 4**).
- Pull the cable snug.
- Feed the cable through the new cable housing and stops.
- Attach the cable to the derailleur and adjust indexing per the derailleur instructions.

MAINTENANCE

Clean all shifter parts using only water and mild soap.



3.0 COMP / MRX COMP · TWIST SHIFTERS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

3
0
C
O
M
P

3.0 Comp						
Com- pat- tibil- ity	Version	Shorty	Shorty	Shorty	Shorty	Shorty
	Shifter Type	Front / Micro adjust	Front / Index	Rear 1:1 Actuation Ratio	Rear 1:1 Actuation Ratio	Rear 1:1 Actuation Ratio
	Speeds	3	3	8	7	6
	Deraillleur	SRAM & Shimano	SRAM & Shimano	SRAM 1:1 Actuation Ratio		←
	Crankset	Triple Indexed	Triple Indexed			
	Cable Pull Release	SRS	SRS	SRS	SRS	SRS
	Cable	Standard Steel	←	←	←	←
	Gear Indication	Printed	Printed	Printed	Printed	Printed
	Barrel Adjuster	Friction	Friction	Friction	Friction	Friction
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm	22.3 mm	22.3 mm
	Shifter Length	67 mm	←	←	←	←
	Weight	67 g	67 g	67 g	67 g	67 g


M
R
X
C
O
M
P

MRX Comp									
Com- pat- tibil- ity	Version	Shorty	Shorty	Shorty	Shorty	Shorty	Shorty	Shorty	
	Shifter Type	Front / Micro adjust	Front / Index	Rear 2:1				Rear Shimano Rapid Rise	
	Speeds	3	3	8	7	6	5	8	7 6
	Deraillleur	SRAM & Shimano	SRAM & Shimano	Shimano				Shimano Rapid Rise	
	Crankset	Triple Indexed	Triple Indexed						
	Cable Pull Release	SRS	SRS	SRS				SRS	
	Cable	Standard Steel	←	←				←	
	Gear Indication	Printed	Printed	Printed				Printed	
	Barrel Adjuster	Friction	Friction	Friction				Friction	
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm				22.3 mm	
	Shifter Length	67 mm	←	←				←	
	Weight	67 g	67 g	67 g				67 g	

CABLE HOUSING

- Use only new high quality cable and compressionless cable housing with end caps.
- When choosing cable housing lengths, be sure to allow enough housing for an extreme turn of the handlebars in both directions.
- Note also, that different stem lengths and cable stop positions effects cable housing length.

SHIFTER ANATOMY

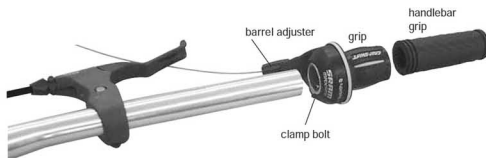

3.0 COMP / MRX COMP · TWIST SHIFTERS ASSEMBLY / MAINTENANCE



1



2



3



4



5

ASSEMBLY

- Slide the shifter onto the handlebar (**Fig. 1**).
 - If necessary, move the brake lever to allow for shifter and stationary grip.
 - Bar end users – don't forget to leave room for the bar end.
- Rotate the shifter until the barrel adjuster is beneath (but out of the way of) the brake lever.
- Tighten the 2.5 mm hex clamp bolt (**Fig. 2**) to 1.7 Nm (15 in.lbs.).
- Slide the stationary grip onto the handlebar (**Fig. 3**).

Caution:

Never use lubricants or solvents to install handlebar grips. Handlebar grips provide safety function.

For this reason, they should be mounted in such a way as to make sure they do not slip off handlebar!

- Feed the cable through the cable housing and stops.
- Attach the front/rear shifter cable to the front/rear derailleur.
- Adjust indexing per derailleur instructions.

Caution:

Not recommended for use on thin walled aluminum handlebars such as Hyperlite® type handlebars or Carbon handlebars.

Caution:

- Always check the front and rear brake levers for proper operation.
- If there is interference between shifters and brake levers, re-adjust lever and shifter placement.
- Check again for proper operation!

CABLE CHANGE

Advice:

- Leave the shifter on the handlebar.
- No need to move other components. The shifter does not need to be opened.
- Use only new high quality cable and compressionless cable housing with endcaps.

- Detach the cable from the derailleur.
- Cut the cable off 6" (15 cm) from the shifter barrel adjuster.
- Discard the old cable and cable housing.
- Line up the "1" (front) or HIGHEST gear number (rear) mark with the indicator mark (MRX Pro Shimano Rapid Rise® Gear number "1" for front and rear). Look for the cable entry.
- Push cable up/out of the shifter and discard (**Fig. 4**).
- Feed the new cable through the cable entry and out the barrel adjuster (**Fig. 5**).
- Pull the cable snug.
- Feed the cable through the new cable housing and stops.
- Attach the cable to the derailleur and adjust indexing per the derailleur instructions.

MAINTENANCE

Clean the shifter using only water and mild soap.

3.0 PLUS / 3.0 / MRX PLUS / MRX · TWIST SHIFTERS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

3
·
0
PLUS
&
3
·
0

3.0 Plus Half Pipe / 3.0 Shorty

Com- pati- bility	Version	3.0 Plus	3.0	3.0 Plus	3.0	3.0 Plus	3.0	3.0 Plus	3.0
	Shifter Type	Front / Micro adjust		Front / Index		Rear 1:1 Actuation Ratio		Rear 1:1 Actuation Ratio	
Com- pati- bility	Speeds			3		8		7	
	Derailleur	SRAM & Shimano		SRAM & Shimano		SRAM 1:1 Actuation Ratio		SRAM 1:1 Actuation Ratio	
Com- pati- bility	Crankset	Triple Indexed		Triple Indexed					
	Cable Pull Release	FFS		FFS		Standard		Standard	
Com- pati- bility	Cable	Die Drawn Steel		←		←		←	
	Gear Indication	Printed		Printed		Printed		Printed	
Com- pati- bility	Barrel Adjuster	Indexing		Indexing		Indexing		Indexing	
	Clamping Diameter	22.3 mm		22.3 mm		22.3 mm		22.3 mm	
Com- pati- bility	Shifter Length	96 mm	64 mm	96 mm	64 mm	96 mm	64 mm	96 mm	64 mm
	Weight	N/A	58 g	N/A	58 g	N/A	58 g	N/A	58 g

MRX
PLUS

MRX Plus Half Pipe

Com- pati- bility	Version	Half Pipe	Half Pipe	Half Pipe	Half Pipe
	Shifter Type	Front / Micro adjust		Rear 2:1	
Com- pati- bility	Speeds	3		8	7
	Derailleur	SRAM & Shimano		Shimano	
Com- pati- bility	Crankset	Triple Indexed		Shimano Rapid Rise	
	Cable Pull Release	FFS direct		Standard	
Com- pati- bility	Cable	Die Drawn Steel		←	
	Gear Indication	Printed		Printed	
Com- pati- bility	Barrel Adjuster	Indexing		Indexing	
	Clamping Diameter	22.3 mm		22.3 mm	
Com- pati- bility	Shifter Length	96 mm		←	
	Weight	N/A		N/A	

MRX


MRX

Com- pati- bility	Version	Shorty	Shorty	Shorty	Shorty
	Shifter Type	Front / Micro adjust		Rear 2:1	
Com- pati- bility	Speeds	3		8	7
	Derailleur	SRAM & Shimano		Shimano	
Com- pati- bility	Crankset	Triple Indexed		Shimano Rapid Rise	
	Cable Pull Release	FFS		Standard	
Com- pati- bility	Cable	Standard Steel		Standard	
	Gear Indication	Printed		Printed	
Com- pati- bility	Barrel Adjuster	Indexing		Indexing	
	Clamping Diameter	22.3 mm		22.3 mm	
Com- pati- bility	Shifter Length	64 mm		64 mm	
	Weight	58 g		58 g	


CABLE HOUSING

- Use only new high quality cable and compressionless cable housing with end caps.
- When choosing cable housing lengths, be sure to allow enough housing for an extreme turn of the handlebars in both directions.
- Note also, that different stem lengths and cable stop positions effects cable housing length.


SHIFTER ANATOMY

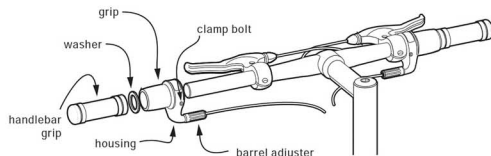


1



2



3

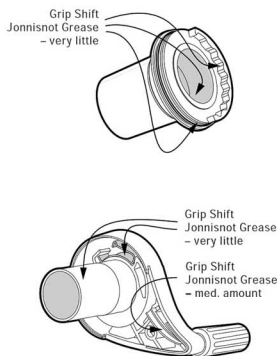

ASSEMBLY

Front and Rear:

- Slide the shifter onto the handlebar.
 - If necessary, move the brake lever to allow for shifter and handlebar grip.
 - Bar end users – don't forget to leave room for the bar end.
- Rotate the shifter until the barrel adjuster is beneath (but out of the way of) the brake lever.
- Tighten the 2.5 mm hex clamp bolt to 1.7 Nm (15 in.lbs.).
- Slide the plastic washer onto the handlebar.
- Slide the handlebar grip onto bar.

Caution:

Never use lubricants or solvents to install handlebar grips. Handlebar grips provide safety function.

For this reason, they should be mounted in such a way as to make sure they do not slip off handlebar!

- Feed the cable through the cable housing and frame stops.
- Attach cable to the derailleur.
- Adjust indexing per derailleur instructions.

Caution:

Not recommended for use on thin walled aluminum handlebars such as Hyperlite® type handlebars or Carbon handlebars.

Advice:

- Always check the front and rear brake levers for proper operation.
- If there is interference between shifters and brake levers, re-adjust lever and shifter placement.
- Check again for proper operation!

CABLE CHANGE

Advice:

- Leave the shifter on the handlebar.
- No need to move other components. The shifter does not need to be opened.
- Use only new high quality cable and compressionless cable housing with endcaps.

See Figure 1 (3.0 Plus / MRX Plus) or Figure 2 (3.0 / MRX)

- Detach the cable from the derailleur.
- Cut the cable off 15 cm (6") from shifter barrel adjuster. Discard old cable and cable housing.
- Rotate the shifter until the cable entry is visible.
- 3.0 / MRX only: Carefully peel back the corner of the grip cover shown in Fig. 2. Use your fingernail or a small screw-driver.
- Remove and discard the rest of the old cable.
- Feed the new cable through the cable entry in the grip and out through the barrel adjuster.
- Feed the cable through the new cable housing and stops.
- Attach the cable to the derailleur and adjust indexing per derailleur instruction.

MAINTENANCE

- Clean all shifter parts using only water and mild soap.
- Use only Grip Shift Jonnisnot Grease for any shifter lubrication.
- After proper cleaning relubricate the areas shown in Fig. 3.

X.0 / X-9 · TRIGGER SHIFTERS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

X
·
O

X
·
9

	X.0		X-9	
Shifter Type	Front / Index	Rear 1:1 Actuation Ratio	Front / Index	Rear 1:1 Actuation Ratio
Speeds	3	9	3	9
Deraileur	SRAM & Shimano		SRAM & Shimano	
Cranksset	Triple Indexed		Triple Indexed	
Cable Pull Release	Zero loss Technology	←	Zero loss Technology	←
Cable	Teflon Coat. Stainl. Steel	Teflon Coat. Stainl. Steel	Teflon Coat. Stainl. Steel	Teflon Coat. Stainl. Steel
Gear Indication	None	None	None	None
Barrel Adjuster	Indexing, Composite	Indexing, Composite	Indexing, Composite	Indexing, Composite
Clamping Diameter	22.3 mm	22.3 mm	22.3 mm	22.3 mm
Weight	112 g	112 g	120 g	120 g

CABLE HOUSING


- Use only new high quality cable and compressionless cable housing with end caps.
- When choosing cable housing lengths, be sure to allow enough housing for an extreme turn of the handlebars in both directions.
- Note also, that different stem lengths and cable stop positions effects cable housing length.

SHIFTER ANATOMY



X.0 / X-9 · TRIGGER SHIFTERS

ASSEMBLY

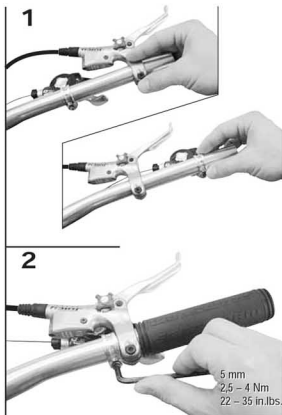

ASSEMBLY

- Slide shifter and brake lever onto handlebar. Either component can be mounted first, depending on personal preference (**Fig. 1**).
- Slide the handlebar grip onto the handlebar.
Caution:
Never use lubricants or solvents to install handlebar grips. Handlebar grips provide safety function.
For this reason, they should be mounted in such a way as to make sure they do not slip off handlebar!

- Choose the best position for your ergonomic needs. Tighten the 5 mm hex clamp bolt to 2,5 – 4 Nm (22 – 35 in.lbs.) (**Fig. 2**).
- Feed the cable through the cable housing and stops. Make sure the shifter is in fully released position (lowest gear position (front shifter) or the highest gear number (rear shifter)).

- Attach the front/rear shifter cable to the front/rear deraileur.
- Adjust indexing per deraileur instructions.

Caution:

- **Always check the front and rear brake levers for proper operation.**
- **If there is interference between a shifter and a brake lever, rotate one out of the way.**
- **Check for proper brake lever operation again!**


X.0 / X-9 · TRIGGER SHIFTERS ASSEMBLY / USE / MAINTENANCE



3



4



5



6



USE

Caution:

- Always check the front and rear brake levers for proper operation.
- If there is interference between a shifter and a brake lever, rotate one out of the way.
- Check for proper brake lever operation again!

The shifter offers the following adjustments:

- Shifter can be installed on handlebar inside and outside of brake (Fig. 1).
- Clamp can be installed in two positions on shifter housing (Fig. 3). Tighten the 5 mm hex clamp bolt to 2.5 – 4 Nm (22 – 35 in.lbs.).
- Aluminum lever orientation is infinitely adjustable (Fig. 4).

CABLE CHANGE

Advice:

Use only new high quality cable and compressionless cable housing with endcaps.

- Make sure the shifter is in fully released position (lowest gear position (front shifter) or the highest gear number (rear shifter)).
- Detach the cable from the derailleur.
- Cut the cable off 6" (15 cm) from the shifter barrel adjuster. Discard the old cable and cable housing.
- Remove cover (Fig. 5).
- Remove cable. It may be helpful to use a pick (Fig. 6).
- Feed the new cable through the cable entry and out of the barrel adjuster.
- Replace cover.
- Feed the cable through the new cable housing and cable stops.
- Attach the cable to the derailleur and adjust indexing per derailleur instructions.

MAINTENANCE

Clean the shifter using only water and mild soap.

X-7 / SX5 / ATTACK · TRIGGER SHIFTERS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

X-7
SX5

		X-7		SX 5	
Com- pati- bility	Shifter Type	Front / Index	Rear 1:1 Actuation Ratio	Front / Index	Rear 1:1 Actuation Ratio
	Speeds	3	9	3	9 8
	Derailleur	SRAM & Shimano	SRAM 1:1 Actuation Ratio	SRAM & Shimano	SRAM 1:1 Actuation Ratio
	Crankset	Triple Indexed		Triple Indexed	
	Cable Pull Release	Impulse Technology	←	Impulse Technology	←
	Cable	Stainless Steel	Teflon Coat. Stainl. Steel	Stainless Steel	←
	Gear Indication	Window	Window	Window	Window
	Barrel Adjuster	Indexing, Aluminum	Indexing, Aluminum	Indexing	Indexing
	Clamping Diameter	22.3 mm	22.3 mm	22.3 mm	22.3 mm
	Shifter Length	26 mm	←	26 mm	←
	Weight	262 g	262 g	260 g	260 g

ATTACK

		Attack	
Com- pati- bility	Shifter Type	Front / Index	Rear 2:1
	Speeds	3	9 8
	Derailleur	SRAM & Shimano	Shimano
	Crankset	Triple Indexed	
	Cable Pull Release	Impulse Technology	←
	Cable	Stainless Steel	←
	Gear Indication	Window	Window
	Barrel Adjuster	Indexing	Indexing
	Clamping Diameter	22.3 mm	22.3 mm
	Shifter Length	26 mm	←
	Weight	260 g	260 g

CABLE HOUSING

- Use only new high quality cable and compressionless cable housing with end caps.
- When choosing cable housing lengths, be sure to allow enough housing for an extreme turn of the handlebars in both directions.
- Note also, that different stem lengths and cable stop positions effects cable housing length.


SHIFTER ANATOMY



X-7 / SX5 / ATTACK · TRIGGER SHIFTERS WARTUNG



1



2



3



4



ASSEMBLY

- Slide shifter and brake lever onto handlebar. Either component can be mounted first (**Fig. 1**).
 - Slide the handlebar grip onto the handlebar.
- Caution:**
Never use lubricants or solvents to install handlebar grips. Handlebar grips provide safety function. For this reason, they should be mounted in such a way as to make sure they do not slip off handlebar!

- Position the shifter as you wish. We recommend that the surface of the smaller shift lever is vertical. Tighten the 5 mm hex clamp bolt to 44 in.lbs. (5 Nm) (**Fig. 2**).
- Feed the cable through the cable housing and stops. Make sure the shifter is in gear position "1" (front shifter) or the HIGHEST gear number (rear shifter).
- Attach the shifter cable to the derailleur.
- Adjust indexing per derailleur instructions.

Caution:

- Always check the front and rear brake levers for proper operation.
- If there is interference between shifters and brake levers, re-adjust lever and shifter placement.
- Check for proper brake lever operation again!

CABLE CHANGE

Advice:

- Leave the shifter on the handlebar.
- The shifter does not need to be opened.
- Use only new high quality cable and compressionless cable housing with endcaps.

- Line-up the shifter in gear position "1" (front shifter) or the HIGHEST gear number (rear shifter).
- Detach the cable from the derailleur.
- Cut the cable off 6" (15 cm) from the shifter barrel adjuster. Discard the old cable and cable housing.
- Carefully unscrew cable change cap from cable entry with a screwdriver (**Fig. 3**).
- Push cable out of the cable entry with rotating movement (**Fig. 4**).
- Feed the new cable through the cable entry and out the barrel adjuster (**Fig. 5**). It may be helpful to remove the barrel adjuster for better visibility.
- Replace cable change cap.
- Feed the cable through the new cable housing and cable stops.
- Attach the cable to the derailleur and adjust indexing per derailleur instructions.

MAINTENANCE

Clean the shifter using only water and mild soap.

5



SX 4 / TRX · TRIGGER SHIFTERS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

SX 4

SX 4			
Shifter Type	Front / Index	Rear 1:1 Actuation Ratio	Rear 1:1 Actuation Ratio
Speeds	3	8	7
Derailleur	SRAM & Shimano		
Crankset	Triple Indexed		
Cable Pull Release	Uni-Lever Technology	←	←
Cable	Standard		
Gear Indication	Window	Window	Window
Barrel Adjuster	Indexing	Indexing	Indexing
Clamping Diameter	22.3 mm	22.3 mm	22.3 mm
Shifter Length	N/A	←	←
Weight	130 g	130 g	130 g

TRX

TRX			
Shifter Type	Front / Index	Rear 2:1	Rear 2:1
Speeds	3	8	7
Derailleur	SRAM & Shimano	Shimano	Shimano
Crankset	Triple Indexed		
Cable Pull Release	Uni-Lever Technology	←	←
Cable	Standard	←	←
Gear Indication	Window	Window	Window
Barrel Adjuster	Indexing	Indexing	Indexing
Clamping Diameter	22.3 mm	22.3 mm	22.3 mm
Shifter Length	N/A	←	←
Weight	130 g	130 g	130 g

CABLE HOUSING

- Use only new high quality cable and compressionless cable housing with end caps.
- When choosing cable housing lengths, be sure to allow enough housing for an extreme turn of the handlebars in both directions.
- Note also, that different stem lengths and cable stop positions effects cable housing length.

SHIFTER ANATOMY



SX 4 / TRX · TRIGGER SHIFTERS ASSEMBLY / MAINTENANCE



1



2



3



4



5



ASSEMBLY

- Slide first shifter then brake lever onto handlebar (Fig. 1).
- Slide the handlebar grip onto the handlebar.

Caution:

Never use lubricants or solvents to install handlebar grips. Handlebar grips provide safety function. For this reason, they should be mounted in such a way as to make sure they do not slip off handlebar!

- Position the shifter as you wish. Locate the perfect position of shifter levers for your ergonomic needs. Tighten the 5 mm hex clamp bolt to 44 in.lbs. (5 Nm) (Fig. 2).
- Feed the cable through the cable housing and stops. Make sure the shifter is in gear position "1" (front shifter) or the HIGHEST gear number (rear shifter).
- Attach the shifter cable to the derailleur.
- Adjust indexing per derailleur instructions.

Caution:

- **Always check the front and rear brake levers for proper operation.**
- **If there is interference between shifters and brake levers, re-adjust lever and shifter placement.**
- **Check for proper brake lever operation again!**

CABLE CHANGE

Advice:

- **Leave the shifter on the handlebar.**
- **The shifter does not need to be opened.**
- **Use only new high quality cable and compressionless cable housing with endcaps.**

- Line-up the shifter in gear position "1" (front shifter) or the HIGHEST gear number (rear shifter).
- Detach the cable from the derailleur.
- Cut the cable off 6" (15 cm) from the shifter barrel adjuster. Discard the old cable and cable housing.
- Carefully unscrew cable change cap from cable entry with a screwdriver (Fig. 3).
- Push cable out of the cable entry with rotating movement (Fig. 4).
- Feed the new cable through the cable entry and out the barrel adjuster (Fig. 5). It may be helpful to remove the barrel adjuster for better visibility.
- Replace cable change cap.
- Feed the cable through the new cable housing and cable stops.
- Attach the cable to the derailleur and adjust indexing per derailleur instructions.

MAINTENANCE

Clean the shifter using only water and mild soap.

CASSETTES · MTB

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

PG990
PG980

		PG 990		PG 980	
		Application	MTB	MTB	MTB
Compatibility	Technology	Power Glide II	Power Glide II	Power Glide II	Power Glide II
	Largest Cog	34 T	32 T	34 T	32 T
	Speeds	9	9	9	9
	Chains	SRAM / 9 speed index	SRAM / 9 speed index	SRAM / 9 speed index	SRAM / 9 speed index
	Hubs	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG
Design	Cogs	11/13/15/17/21/23/26/30/34	11/12/14/16/18/21/24/28/32	11/13/15/17/21/23/26/30/34	11/12/14/16/18/21/24/28/32
	Lockring torque	40 Nm	40 Nm	40 Nm	40 Nm
	Weight	310 g	280 g	310 g	280 g
	Cogs	SAPH 440 steel	SAPH 440 steel	SAPH 440 steel	SAPH 440 steel
	Spider	Aluminum, forged	Aluminum, forged	Aluminum	Aluminum
Design	Lockring	Aluminum, anodized	Aluminum, anodized	Chrome Plated, Satin	Chrome Plated, Satin
	Rivets	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
	Finish	Pearl Ni-Chrome Plated	Pearl Ni-Chrome Plated	Pearl Ni-Chrome Plated	Pearl Ni-Chrome Plated

PG970

		PG 970				
		Application	MTB	Road	Road	Road
Compatibility	Technology	Power Glide II	Power Glide II	Power Glide II	Power Glide II	Power Glide II
	Largest Cog	34 T	32 T	26 T	23 T	23 T
	Speeds	9	9	9	9	9
	Chains	SRAM / 9 speed index	SRAM / 9 speed index	SRAM / 9 speed index	SRAM / 9 speed index	SRAM / 9 speed index
	Hubs	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG
Design	Cogs	11/13/15/17/20/23/26/30/34	11/12/14/16/18/21/24/28/32	12/13/14/15/17/19/21/23/26	12/13/14/15/16/17/19/21/23	11/12/13/14/15/17/19/21/23
	Lockring torque	40 Nm	40 Nm	40 Nm	40 Nm	40 Nm
	Weight	410 g	330 g	230 g	210 g	210 g
	Cogs	SAPH 440 steel	SAPH 440 steel	SAPH 440 steel	SAPH 440 steel	SAPH 440 steel
	Lockring	Chrome Plated, Satin	Chrome Plated, Satin	Aluminum, anodized	Aluminum, anodized	Aluminum, anodized
Design	Screws	Steel / Zinc Coat	Steel / Zinc Coat	Steel / Zinc Coat	Steel / Zinc Coat	Steel / Zinc Coat
	Finish	Chrome Plated, Satin	Chrome Plated, Satin	Ni-Chrome Plated	Ni-Chrome Plated	Ni-Chrome Plated

PG970
PG950

		PG 970		PG 950		
		Application	MTB	MTB	Road	Road
Compatibility	Technology	Power Glide II	Power Glide II	Power Glide II	Power Glide II	Power Glide II
	Largest Cog	21 T	34 T	32 T	26 T	26 T
	Speeds	9	9	9	9	9
	Chains	SRAM / 9 speed index	SRAM / 9 speed index	SRAM / 9 speed index	SRAM / 9 speed index	SRAM / 9 speed index
	Hubs	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG
Design	Cogs	11/12/13/14/15/16/17/19/21	11/13/15/17/20/23/26/30/34	11/12/14/16/18/21/24/28/32	12/13/14/15/17/19/21/23/26	11/12/13/15/17/19/21/23/26
	Lockring torque	40 Nm	40 Nm	40 Nm	40 Nm	40 Nm
	Weight	200 g	460 g	380 g	240 g	235 g
	Cogs	SAPH 440 steel	Steel	Steel	SAPH 440 steel	SAPH 440 steel
	Lockring	Aluminum, anodized	Forged Steel	Forged Steel	Forged Steel	Forged Steel
Design	Screw	Steel / Zinc Coat	Steel / Zinc Coat	Steel / Zinc Coat	Steel / Zinc Coat	Steel / Zinc Coat
	Finish	Ni-Chrome Plated	Ni-Chrome Plated	Ni-Chrome Plated	Ni-Chrome Plated	Ni-Chrome Plated

CASSETTES · MTB

TECHNICAL DATA / ASSEMBLY REQUIREMENTS



PG 950

		PG 950			
Compatibility	Application	Road	Road		
	Technology	Power Glide II	Power Glide II		
	Largest Cog	28 T	23 T		
	Speeds	9	9		
	Chains	SRAM / 9 speed index	SRAM / 9 speed index		
	Hubs	9 / 8 speed HG	9 / 8 speed HG		
Design	Cogs	11/12/13/14/16/18/21/24/28	12/13/14/15/16/17/19/21/23		
	Lockring torque	40 Nm	40 Nm		
	Weight	246 g	220 g		
	Cogs	SAPH 440 steel	SAPH 440 steel		
	Lockring	Forged Steel	Forged Steel		
	Screw	Steel / Zinc Coat	Steel / Zinc Coat		
	Finish	Ni-Chrome Plated	Ni-Chrome Plated		

PG 850

		PG 850				
Compatibility	Application	MTB	MTB	MTB	Road	Road
	Technology	Power Glide II	Power Glide II	Power Glide II	Power Glide II	Power Glide II
	Largest Cog	32 T	30 T	28 T	26 T	23 T
	Speeds	8	8	8	8	8
	Chains	SRAM / 8 speed index	SRAM / 8 speed index	SRAM / 8 speed index	SRAM / 8 speed index	SRAM / 8 speed index
	Hubs	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG
Design	Cogs	11/12/14/16/18/21/26/32	11/13/15/17/20/23/26/30	11/12/14/16/18/21/24/28	12/13/15/17/19/21/23/26	12/13/14/15/17/19/21/23
	Lockring torque	40 Nm	40 Nm	40 Nm	40 Nm	40 Nm
	Weight	280 g	310 g	250 g	230 g	220 g
	Cogs	SAPH 440 steel	SAPH 440 steel	SAPH 440 steel	SAPH 440 steel	SAPH 440 steel
	Lockring	Forged Steel	Forged Steel	Forged Steel	Forged Steel	Forged Steel
	Screw	Steel / Zinc Coat	Steel / Zinc Coat	Steel / Zinc Coat	Steel / Zinc Coat	Steel / Zinc Coat
	Finish	Ni-Chrome Plated	Ni-Chrome Plated	Ni-Chrome Plated	Ni-Chrome Plated	Ni-Chrome Plated

PG 830 PG 730

		PG 830			PG 730	
Compatibility	Application	MTB	MTB	MTB	MTB	
	Technology	Power Glide II	Power Glide II	Power Glide II	Power Glide II	
	Largest Cog	32 T	30 T	28T	32T	
	Speeds	8	8	8	7	
	Chains	SRAM / 8 speed index	SRAM / 8 speed index	SRAM / 8 speed index	SRAM / 7 speed index	
	Hubs	9 / 8 speed HG	9 / 8 speed HG	9 / 8 speed HG	7 speed HG	
Design	Cogs	11/12/14/16/18/21/26/32	11/13/15/17/20/23/26/30	11/12/14/16/18/21/24/28	12/14/16/18/21/26/32	
	Lockring torque	40 Nm	40 Nm	40 Nm	40 Nm	
	Weight	320 g	340 g	280 g	310 g	
	Cogs	Steel	Steel	Steel	Steel	
	Lockring	Forged Steel	Forged Steel	Forged Steel	Forged Steel	
	Screw	Steel / Zinc Coat	Steel / Zinc Coat	Steel / Zinc Coat	Steel / black Zinc Coat	
	Finish	Ni-Chrome Plated	Ni-Chrome Plated	Ni-Chrome Plated	Ni-Chrome Plated	

CASSETTES · MTB ASSEMBLY / MAINTENANCE

1



ASSEMBLY

- Position the cassette cluster and individual sprockets on the cassette body by aligning the spline pattern (**Fig. 1**).
- Screw the locking in to the cassette body and tighten it to 40 Nm (350 in.lbs.) by using a cassette tool (1, **Fig. 2**) like the Park Tool® FR-5 or Shimano® and a chain wrench (2).
- Adjust the rear derailleur according to the installation advice from the derailleur manufacturer.

Advice:

Due to the optimized stability of the rear wheel, there is less space between the right spoke flange and the sprocket cassette. This means that not all spoke protector discs available on the market will fit. Please carry out a trial assembly run before specifying spoke protector discs (spoke protector discs must not rub against the sprocket cassette).

MAINTENANCE


Advice:

- The only maintenance necessary on the cassette is to replace worn sprockets.
 - If the chain jumps repeatedly on a sprocket with correct derailleur setting it might be sufficient to replace only the chain.
- If the new chain also jumps on the sprocket the sprocket is worn out and should be replaced.*
- Always put on a new chain when you replace worn sprockets.


To replace the sprocket do as follows:

- Remove the locking by using cassette tool (1, **Fig. 3**) and a chain wrench (2) to hold the cassette.
- Disassemble the sprocket cluster by unscrewing the small bolt on the backside of the cassette.
- Replace worn or damaged sprocket and re-assemble sprockets and spacers in the correct order and re-install the bolt.
- Make sure that all the splines on the cogs are aligned to each other and the cassette body pattern.
- Tighten the cassette with 40 Nm (350 in.lbs.) (see **ASSEMBLY**).

2



3



POWER CHAINS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS

POWER CHAINS

	PC 1090R	NEW	PC 1090	NEW	PC 1070	NEW	
Application	Road		Road		Road		
Max. No. of sprockets	10 only		10 only		10 only		
Compatibility Front	Truvativ / HG / EXA-Drive		Truvativ / HG / EXA-Drive		Truvativ / HG / EXA-Drive		
Compatibility Rear	SRAM OG / HG / EXA-Drive		SRAM OG / HG / EXA-Drive		SRAM OG / HG / EXA-Drive		
Dimension	$\frac{1}{2}'' \times \frac{11}{128}''$		$\frac{1}{2}'' \times \frac{11}{128}''$		$\frac{1}{2}'' \times \frac{11}{128}''$		
Length	5.87 mm		5.87 mm		5.87 mm		
Riveting	Cylindrical		Cylindrical		Cylindrical		
Chrome Hardened	Yes		Yes		Yes		
Push Power	2000 N / 450 lbs.		2000 N / 450 lbs.		2000 N / 450 lbs.		
Min. Tensile Strength	9000 N / 2023 lbs.		9000 N / 2023 lbs.		9000 N / 2023 lbs.		
Weight (114 links)	257 g		265 g		265 g		
Design							
External Pin Plate	Silver / Nickel Plated		Silver / Nickel Plated		Silver / Nickel Plated		
Internal Pin Plate	Silver / Nickel Plated		Silver / Nickel Plated		Grey		
Connecting Method ¹	Power Lock 10 Speeds		Power Lock 10 Speeds		Power Lock 10 Speeds		

¹ **Caution:** Connecting method: with Power Lock only (no pin)

POWER CHAINS

	PC 991	PC 991 Hollow Pin	PC 991 Cross Step	PC 971	PC 951
Application	MTB / Road	MTB / Road	MTB / Road	MTB / Road	MTB / Road
Max. No. of sprockets	9 only	9 only	9 only	9 only	9 only
Compatibility Front	Truvativ / HG / EXA-Drive	Truvativ / HG / EXA-Drive	Truvativ / HG / EXA-Drive	Truvativ / HG / EXA-Drive	Truvativ / HG / EXA-Drive
Compatibility Rear	HG / PG / EXA-Drive	HG / PG / EXA-Drive	HG / PG / EXA-Drive	HG / PG / EXA-Drive	HG / PG / EXA-Drive
Dimension	$\frac{1}{2}'' \times \frac{11}{128}''$	$\frac{1}{2}'' \times \frac{11}{128}''$	$\frac{1}{2}'' \times \frac{11}{128}''$	$\frac{1}{2}'' \times \frac{11}{128}''$	$\frac{1}{2}'' \times \frac{11}{128}''$
Length	6.65 mm	6.35 mm	6.65 mm	6.65 mm	6.65 mm
Riveting	Step	Cylindrical	Cross Step	Step	Step
Chrome Hardened	Yes	Yes	Yes	Yes	Yes
Push Power	2000 N / 450 lbs.	2000 N / 450 lbs.	2500 N / 562 lbs.	2000 N / 450 lbs.	2000 N / 450 lbs.
Min. Tensile Strength	9000 N / 2023 lbs.	9000 N / 2023 lbs.	9000 N / 2023 lbs.	9000 N / 2023 lbs.	9000 N / 2023 lbs.
Weight (114 links)	297 g	276 g	297 g	297 g	297 g
Design					
External Pin Plate	Nickel Plated	Nickel Plated	Nickel Plated	Nickel Plated	Grey
Internal Pin Plate	Nickel Plated	Nickel Plated	Nickel Plated	Grey	Grey
Connecting Method ¹	Power Link Gold or Pin	Power Link Gold	Power Link Gold	Power Link Gold or Pin	Power Link Gold or Pin

¹ **Caution:** Hollow Pin and Cross Step chains connecting method: with Power Link only (no pin)

POWER CHAINS

TECHNICAL DATA / ASSEMBLY REQUIREMENTS



POWER CHAINS

	PC 68	PC 58	PC 48	PC 38 Saltshaker	PC 38
Application	MTB / Road	MTB / Road	MTB / Road	MTB / Road	MTB / Road
Max. No. of sprockets	max. 8	max. 8	max. 8	max. 8	max. 8
Compatibility Front	HG / IG / PG / EXA-Drive	HG / IG / PG / EXA-Drive	HG / IG / PG / EXA-Drive	HG / IG / EXA-Drive	HG / IG / EXA-Drive
Compatibility Rear	HG/HG-1/IG/PG/EXA-Drive	HG/HG-1/IG/PG/EXA-Drive	HG/HG-1/IG/PG/EXA-Drive	HG/HG-1/IG/PG/EXA-Drive	HG/HG-1/IG/PG/EXA-Drive
Dimension	$\frac{1}{2}'' \times \frac{1}{32}''$	$\frac{1}{2}'' \times \frac{1}{32}''$	$\frac{1}{2}'' \times \frac{1}{32}''$	$\frac{1}{2}'' \times \frac{1}{32}''$	$\frac{1}{2}'' \times \frac{1}{32}''$
Length	7.1 mm	7.1 mm	7.1 mm	7.1 mm	7.1 mm
Riveting	Cross Step	Step	Step	Step	Step
Chrome Hardened	Yes	Yes	Yes	No	No
Push Power	2000 N / 450 lbs.	1500 N / 340 lbs.	1500 N / 340 lbs.	1300 N / 292 lbs.	1300 N / 292 lbs.
Min. Tensile Strength	9000 N / 2023 lbs.	9000 N / 2023 lbs.	9000 N / 2023 lbs.	9000 N / 2023 lbs.	9000 N / 2023 lbs.
Weight (114 links)	307 g	307 g	307 g	307 g	307 g
External Pin Plate	Silver / Nickel Plated	Silver / Nickel Plated	Grey / Polished	Light Grey	Grey / Polished
Internal Pin Plate	Silver / Nickel Plated	Grey / Polished	Grey / Polished	Light Grey	Grey / Polished
Connecting Method	Power Link Silver	Power Link Silver or Pin	Power Link Silver or Pin	Power Link SS2 or Pin	Power Link Silver or Pin


POWER CHAINS

	PC 10 Saltshaker	PC 10	PC 1 Saltshaker	PC 1 Ni	PC 1
Application	MTB	MTB	Gear Hubs	Gear Hubs	Gear Hubs
Max. No. of sprockets	max. 7	max. 7	1	1	1
Compatibility Front	Single / HG	Single / HG	Single	Single	Single
Compatibility Rear	Single / HG	Single / HG	Single	Single	Single
Dimension	$\frac{1}{2}'' \times \frac{1}{32}''$	$\frac{1}{2}'' \times \frac{1}{32}''$	$\frac{1}{2}'' \times \frac{1}{8}''$	$\frac{1}{2}'' \times \frac{1}{8}''$	$\frac{1}{2}'' \times \frac{1}{8}''$
Length	6.9 mm	6.9 mm	7.8 mm	7.8 mm	8.9 mm
Riveting	Step	Step	Step	Step	V shape
Chrome Hardened	No	No	No	No	No
Push Power	1000 N / 225 lbs.	1000 N / 225 lbs.	800 N / 180 lbs.	800 N / 180 lbs.	800 N / 180 lbs.
Min. Tensile Strength	9000 N / 2023 lbs.	9000 N / 2023 lbs.	9000 N / 2023 lbs.	9000 N / 2023 lbs.	9000 N / 2023 lbs.
Weight (114 links)	300 g	300 g	330 g	330 g	408 g
External Pin Plate	Light Grey	Brown	Light Grey	Silver / Nickel Plated	Brown
Internal Pin Plate	Light Grey	Brown	Light Grey	Silver / Nickel Plated	Brown
Connecting Method	Power Link SS1 or Pin	Power Link Grey or Pin	Snap Lock or Pin	Snap Lock, 3pcs Connection Link or Pin	


POWER CHAINS

ASSEMBLY / MAINTENANCE


1




2




3




4



5



6



PC 1090R / PC 1090 / PC 1070
($\frac{1}{2}$ " x $\frac{11}{128}$ ")

Chain length:

(A chain tool will be required to shorten the chain.)

- Replacing a worn chain: Measure the worn chain and shorten the new to the same length.
- Initial assembly: Shorten the chain to the length specified by the derailleur manufacturer. SRAM derailleur: place the chain over largest front chainwheel and largest rear sprocket and add 1 link + Power Lock (**Fig. 1**).

Closing chain with Power Lock:

Caution:

- **Use Power Lock only with SRAM chains!**
- **Use only Power Lock to close 10 speed chains (no Pin)!**
- **Use only Power Lock (black coloured) for PC 1090R, PC 1090, PC 1070 to avoid material damage or the rider to fall off his bicycle resulting in injury.**

- Fit chain, insert both halves of the Power Lock into the chain ends (**Fig. 2**) and bring the ends together (**Fig. 3**) on the bottom side of the drivetrain (no tension side).
- Pull chain apart until you feel some resistance (**Fig. 4**).
- Rotate the chain so the Power Lock is positioned on the top side of the drivetrain (**Fig. 5**).
- Pedal forward while holding bike firmly in place (**Fig. 5**) until you hear click sound. The Power Lock is now on its place and safely closed.

Opening:

Once the Power Lock is installed it can only be removed by means of a Chain tool.

Caution:

- **Power Lock is for one-time use only!**
- **Always use a new Power Lock when fitting a new chain.**
- **Failure to shorten the chain properly or to lock it exactly into place may cause damage to the chain and eventually total chain failure, material damage or the rider to fall off his bicycle resulting in injury.**
- **Worn sprockets should also be replaced when a new chain is fitted.**

PC 991 / PC 971 / PC 951 / PC 68 / PC 58 / PC 48 / PC 38 / PC 10
($\frac{1}{2}$ " x $\frac{1}{32}$ " AND $\frac{1}{2}$ " x $\frac{11}{128}$ ")

Chain length:

(A chain tool will be required to shorten the chain.)

- Replacing a worn chain: Measure the worn chain and shorten the new to the same length.
- Initial assembly: Shorten the chain to the length specified by the derailleur manufacturer. SRAM derailleur:
 - Place the chain over largest front chainwheel and largest rear sprocket (**Fig. 6**). For rear suspension frame, position the rear suspension for the greatest chain length required.
- Add 2 links or 1 link + Power Link (**Fig. 6**).

Closing chain with Power Link:

Caution:

- **Use Power Link only with SRAM chains!**
- **Use only Power Link to close Hollow Pin chains and Cross Step chains (no Pin)!**
- **Use only as specified, to avoid material damage or the rider to fall off his bicycle resulting in injury:**

Power Link Gold (gold coloured):
for PC 991 Hollow Pin, PC 991 Cross Step, PC 991, PC 971, PC 951
Power Link Silver (silver coloured):
for PC 68, PC 58, PC 48, PC 38
Power Link SS2 (light grey coloured):
für PC 38 Saltshaker
Power Link SS1 (light grey coloured):
für PC 10 Saltshaker
Power Link Grey (grey coloured):
for PC 10

Closing:

- Fit chain, bring the ends together and insert both halves of the Power Link into the chain ends. (**Fig. 2**)
- Press both halves of the Power Link together (**Fig. 3**) and lock in place by pulling the chain apart. (**Fig. 4**)

Opening:

Press both plates of the Power Link together (**Fig. 3**) while sliding the chain ends together (unlock). Remove the two halves of the link from the chain ends.

Caution:

- **Always use a new Power Link when fitting a new chain.**
- **Failure to shorten the chain properly or to lock it exactly into place may cause damage to the chain and eventually total chain failure, material damage or the rider to fall off his bicycle resulting in injury.**
- **Worn sprockets should also be replaced when a new chain is fitted.**

7



Closing standard version with clamping pin:
Fit chain, bring the two ends together and press pin through with assembly tool (**Fig. 12**). The pin must extend by the same amount at both outer plates. It must be possible to move the connecting link slightly.

- Insert outer plate with pins (1) into the chain ends, attach outer plate (2) and press chain lock together (1+2).
- Attach retaining spring (3) with the closed end of the retaining ring pointing in the direction of chain travel (**Fig. 10**).
- Slide retaining spring in the direction of arrow (4, **Fig. 11**) to engage it in the grooves in the pins.

8



P C 1
($\frac{1}{2}'' \times \frac{1}{8}''$)


Chain length:

(A chain tool will be required to shorten the chain.)

- Replacing a worn chain:
Measure the worn chain and shorten the new to the same length.
- Initial assembly:
Shorten the chain to the length specified by the drivetrain manufacturer. SRAM components:
Place the chain over front chainwheel and rear sprocket (**Fig. 7**). For rear suspension frame, position the rear suspension for the greatest chain length required.

Closing standard version with clamping pin:
Fit chain, bring the two ends together and press pin (**Fig. 12**) through with assembly tool. The pin must extend by the same amount at both outer plates. It must be possible to move the connecting link slightly.


9



MAINTENANCE / CARE

- Clean dirty chains before oiling. Do not use any acidic agents. Cleaning agent must be rinsed off after a few minutes with water. Apply oil after chain is completely dried.
- Regular lubrication will extend the chain's service life. Apply oil to the chain links rollers and allow to work in.

10




Closing chain with Snap Lock:

Caution:

Use Snap Lock only with SRAM chains!

- Fit the shortened chain, bring the ends together and connect with the Snap Lock. Place the outer plate on one pin (**Fig. 8**).
- Gently flex the chain until the outside connector plate snaps into position over the second pin (**Fig. 9**).


11



Caution:

- Make sure plate is fully seated in the pin channel and plates are parallel to each other.
- If movement of the connector plate is noticed a new Snap Lock must be used.
- Snap Lock is for one-time use only!
- Always use a new Snap Lock when fitting a new chain.
- Failure to shorten the chain properly or to lock it exactly into place may cause damage to the chain and eventually total chain failure, material damage or the rider to fall off his bicycle resulting in injury.
- Worn sprockets should also be replaced when a new chain is fitted.

12



Closing chain with 3pcs Connection Link:

- Fit the shortened chain, bring the two ends together and connect with the chain lock. The chain lock consists of an outer plate with pins (1, **Fig. 10**), an outer plate (2) and a retaining spring (3).



DISTRIBUTORS

Please check

<http://www.sram.com/en/locator/distributors.php>
for full contact information.

SPARE PARTS

You can find an extensive spare parts program
in SRAM's Spare Parts Catalog Model Year 2007 .
Part Number 95.7915.000.000.

SRAM ORIGINAL PARTS

Caution:

Installation of parts and accessories not originally intended
could result in less than optimal performance and/or injury.

www.sram.com

WORLD HEADQUARTERS

SRAM Corporation
1333 North Kingsbury, 4th floor
Chicago, Illinois 60622
phone: +1-312-664-8800
fax: +1-312-664-8826

EUROPEAN HEADQUARTERS

SRAM Europe
Basicweg 12-D
3821 BR Amersfoort
The Netherlands
phone: +31-33-450-6060
fax: +31-33-457-0200

ASIAN HEADQUARTERS

SRAM Taiwan
No. 1598-8 Chung Shan Road
Shen Kang Hsiang, Taichung
County 429
Taiwan
phone: +886-4-2561-3678
fax: +886-4-2561-3686

SRAM®